


Power Transformers

PC Mount

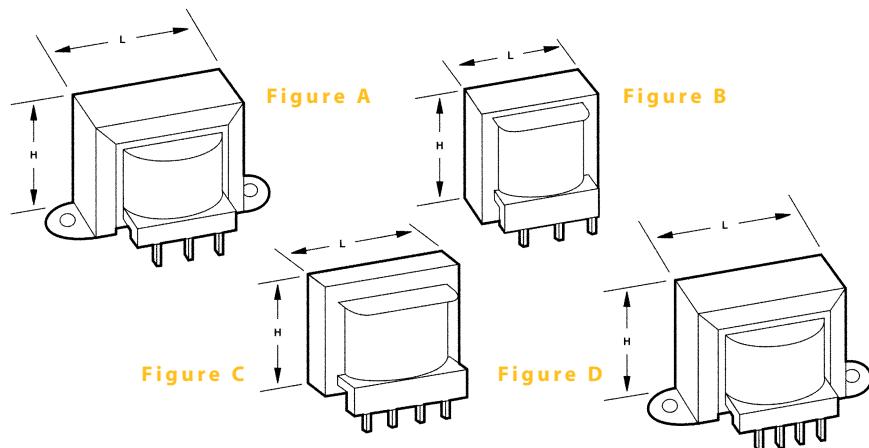

:: Description

Triad power transformers are offered in a wide selection of plug-in types to meet the needs of PC board and solid state power supply designs. These transformers can satisfy power as well as control and instrumentation applications. The transformers are available in single or dual primary and dual center tapped secondary configurations.

:: Specifications

Primary: 115 V, 50/60 Hz

:: Single Primary, Dual Secondaries

Section	Type No.	Figure	VA	Secondary		Dimensions						Wt. Oz.	
				Series	Parallel	H	W	D	L	A	B	MW	
A	F-131P	B	1½	8.0V CT @ 0.188A	4.0V @ 0.376A	1½	•	1½	1½	½	1	•	3.5
	F-139P			12.6V CT @ 0.12A	6.3V @ 0.24A								
	F-132P			15.0V CT @ 0.100A	7.5V @ 0.200A								
	F-150P			17.0V CT @ 0.085A	8.5V @ 0.170A								
	F-138P			25.2V CT @ 0.06A	12.6V @ 0.12A								
	F-133P			30.0V CT @ 0.050A	15.0V @ 0.100A								
	F-160P			34.0V CT @ 0.045A	17.0V @ 0.090A								
	F-137P			40.0V CT @ 0.038A	20.0V @ 0.076A								
	F-134P			54.0V CT @ 0.028A	27.0V @ 0.056A								
	F-135P			76.0V CT @ 0.020A	38.0V @ 0.040A								
B	F-136P	A	4½	116.0V CT @ 0.013A	58.0V @ 0.026A	1½	2½	1¼	1½	½	1½	7.5	
	F-141XP			8.0V CT @ 0.562A	4.0V @ 1.124A								
	F-149XP			12.6V CT @ 0.35A	6.3V @ 0.70A								
	F-142XP			15.0V CT @ 0.300A	7.5V @ 0.600A								
	F-161XP			17.0V CT @ 0.264A	8.5V @ 0.528A								
	F-148XP			25.2V CT @ 0.178A	12.6V @ 0.356A								
	F-143XP			30.0V CT @ 0.150A	15.0V @ 0.300A								
	F-162XP			34.0V CT @ 0.132A	17.0V @ 0.264A								
	F-147XP			40.0V CT @ 0.112A	20.0V @ 0.224A								
	F-144XP			54.0V CT @ 0.084A	27.0V @ 0.168A								
C	F-145XP	A	7½	76.0V CT @ 0.060A	38.0V @ 0.120A	1½	2½	1¼	1½	½	1½	10.5	
	F-146XP			116.0V CT @ 0.033A	58.0V @ 0.066A								
	F-151XP			8.0V CT @ 0.940A	4.0V @ 1.88A								
	F-159XP			12.6V CT @ 0.60A	6.3V @ 1.2A								
	F-152XP			15.0V CT @ 0.500A	7.5V @ 1.000A								
	F-163XP			17.0V CT @ 0.441A	8.5V @ 0.882A								
	F-158XP			25.2V CT @ 0.30A	12.6V @ 0.60A								
	F-153XP			30.0V CT @ 0.250A	15.0V @ 0.500A								
	F-164XP			34.0V CT @ 0.220A	17.0V @ 0.440A								
	F-157XP			40.0V CT @ 0.188A	20.0V @ 0.376A								
D	F-154XP	A	7½	54.0V CT @ 0.140A	27.0V @ 0.280A	1½	2½	1¾	1½	½	1½	10.5	
	F-155XP			76.0V CT @ 0.100A	38.0V @ 0.200A								
	F-156XP			116.0V CT @ 0.085A	58.0V @ 0.130A								

CT = Center Tap Mounting hole size: Figure A = $\frac{3}{16}$ "

:: 115 Volts, 50/60 Hz Primary/Triple Output Secondaries for ± 15 VDC and +5 VDC

Section	Type No.	Figure	VA	Secondary No. 1	Secondary No. 2	Dimensions						Wt. Oz.	
						H	W	D	L	A	B	MW	
D	F-165P	C	1½	24.0V CT @ 0.025A	9.0VCT @ 0.100A	1½	2½	1¾	1½	½	1	•	3.5
	F-167P			32.0V CT @ 0.020A	15.0V CT @ 0.060A								
E	F-168XP	D	4½	32.0V CT @ 0.050A	15.0V CT @ 0.195A	1½	2½	1¼	1½	½	1½	2	7.5
	F-166XP			24.0V CT @ 0.125A	9.0V CT @ 0.500A								
F	F-169XP	D	7½	32.0V CT @ 0.100A	15.0V CT @ 0.287A	1½	2½	1¾	1½	½	1½	2½	10.5
	F-166XP			32.0V CT @ 0.100A	15.0V CT @ 0.287A								

CT = Center Tap Mounting hole size: Figure A = $\frac{3}{16}$ "

:: Outline Dimensions

Technical Notes

1. Hi-pot tested at 1,500 VRMS.

