Miniature High Voltage Ceramic Capacitors

Features

- Compact, Rugged Precise Dimensions
- High Mechanical and Dielectric Strength
- Easy to Install
- Custom Design to Customer Requirements
- Solder Coated Electrodes for Easy Soldering

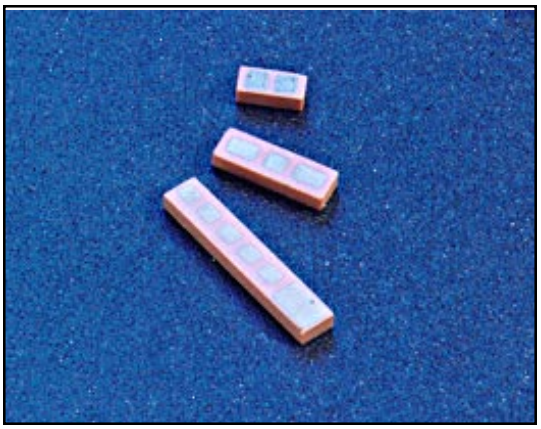

Applications

- Compact capacitance arrays, for multiple circuit coupling, filtering and by-pass application
- Typically used in high voltage, high density power supplies

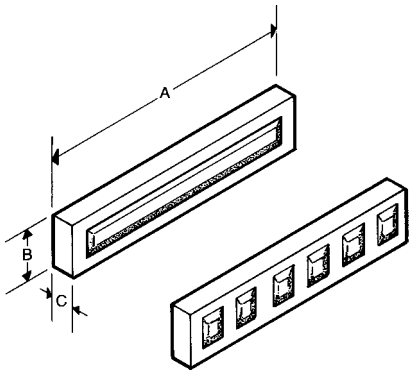

Part Number	No. Sec.	Capacitance p/section	Max. Voltage	Dimensions Inches		
				A	B	C
102-123	6	40-60pF	6000	.500	.100	.050
102-124	3	40-60pF	6000	.340	.10	.050
102-126	4	40-60pF	6000	.500	.100	.050
102-127	3	80-120pF	2500	.310	.150	.032
102-129	1	250pF	6000	.500	.100	.050
102-135	2	70-110pF	2500	.235	.155	.030
102-136	2	30-50pF	6000	.210	.100	.050

©1999 by K and M Electronics, Inc. All rights reserved. Form 901-1297
The information appearing here is believed to be reliable; however, it is not to be construed as a warranty of performance, and no express or implied warranty is made with respect to same.
Any information contained herein is subject to change without notice.

K and M Electronics
ITT Industries
Engineered for life

11 Interstate Drive
West Springfield, MA 01089
tel 413.263.6200
fax 413.737.0608
http://www.kandm.com