

APS

Advanced Power Solutions

09/20/2001

UNIVERSAL INPUT HARMONIC CORRECTION AC-DC SINGLE, DUAL & TRIPLE OUTPUT 50-100 WATTS INTERNAL SWITCHING POWER SUPPLIES APS93VP SERIES



FEATURES:

- ACCOMMODATES UNIVERSAL AC SOURCES
- MEETS IEC1000-3-2 HARMONIC CORRECTION
- MEETS UNIVERSAL SAFETY STANDARDS
- EMI MEETS CISPR PUB.22 CLASS B
- CE MARKING COMPLIANCE

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Typ. 90-264Vac with PFC.
Input Connector: Molex V-M connector.
Input Frequency: 47-63Hz.
Inrush Current: Typ. 23A @230Vac.
Input Current: Typ. 1.5A/115Vac, 0.8A/230Vac.
Dielectric Withstand: Meet IEC950.
EMI: Meet CISPR PUB.22 Class B.
Hold-up Time: Typ. 43mS @ 115Vac & 230Vac.
Over Temp. Protection (OTP): Optional for U-Bracket format
Power Factor Correction: Meet Harmonic Correction per IEC1000-3-2.PF typ.0.98-0.99.
Earth Leakage: Less than 0.63mA.
Overload Protection (OLP): Fully protected against output overload and short circuit. Consult factory for OLP setting.

OUTPUT SPECIFICATION

Output Voltage and Current: See Ratings Charts
Output Connector: Molex V-M connector
Output Wattage: Typ. 50 Watts. Convection;
Max. 93 Watts under forced air flow
Line Regulation: Typ. 0.1-0.5%
Load Regulation: Main VO1: typ. $\pm 1-2.0\%$
Aux. VO2: typ. $\pm 3-5.0\%$ (Stacked on)
VO2: typ. $\pm 2-3.0\%$ (P.R.) Aux. VO3: typ. $\pm 2-3.0\%$ (P.R.)
Noise & Ripple: Typ. 1% peak to peak
OVP: Installed in main VO1 only
Adjustability: Available at main VO1
OR-ing Diodes: Installed in VO1 & VO2

GENERAL SPECIFICATION

Efficiency: Typ. 75%
Switching Frequency: Fixed freq. at 65KHz
Circuit Topology: PWM Fixed-frequency Forward Circuit
Transient Response: Output voltage returns in less than 0.5mS following a 25% load change
Safety Standard: UL1950/ EN60950 Class I
Power Density: 2.5-5.0 Watts / Cubic Inch PCB format
1.7- 3.37 Watts / Cubic Inch U-Bracket format

Operating Temperature: 0 to +50°C at full load and 30 CFM forced air flow for full load
Storage Temperature: -20 to +85°C
Temperature Coefficient: Typ. 0.04% /°C
Cooling: At least 20 CFM forced cooling air is required for 90 watts and up load
Construction: PCB or U-bracket open frame format



In application

OUTPUT VOLTAGE / CURRENT RATINGS CHART

09/20/2001

SINGLE OUTPUT

MODEL NO.	MAIN VO1 ★@●		
	Convect-Cooling	Volt.	30CFM air cooling
APS93VP-033250	12.0A	3.3V	25.0A
APS93VP-050200	10.0A	5.0V	20.0A
APS93VP-120085	4.2A	12.0V	8.5A
APS93VP-150068	3.4A	15.0V	6.8A
APS93VP-240043	2.1A	24.0V	4.3A
APS93VP-280038	1.8A	28.0V	3.8A
APS93VP-360030	1.5A	36.0V	3.0A
APS93VP-480022	1.2A	48.0V	2.2A

DUAL OUTPUT

MODEL NO.	MAIN VO1 ★@●			AUX. +VO2 ●■ or ●		
	Convect-Cooling	Volt.	30CFM air cooling	Convect-Cooling	Volt.	30CFM air cooling
APS93VPD-050I	6.0A	+5.0V	10.0A	2.0A	+12.0V	4.0A
APS93VPD-050K	6.0A	+5.0V	10.0A	1.6A	+15.0V	3.2A
APS93VPD-050M	6.0A	+5.0V	10.0A	1.0A	+24.0V	2.0A
APS93VPD-033I	8.0A	+3.3V	12.0A	2.0A	+12.0V	4.0A
APS93VPD-033K	8.0A	+3.3V	12.0A	1.6A	+15.0V	3.2A
APS93VPD-033M	8.0A	+3.3V	12.0A	1.0A	+24.0V	2.0A


TRIPLE OUTPUT

MODEL NO.	MAIN VO1 ★@●			AUX. +VO2 ●● or ■			AUX. -VO3 ●		
	Convect-Cooling	Volt.	30CFM air cooling	Convect-Cooling	Volt.	30CFM air cooling	Convect-Cooling	Volt.	30CFM air cooling
APS93VPT-050II	4.0A	+5.0V	10.0A	1.5A	+12.0V	3.0A	1.0A	-12.0V	1.5A
APS93VPT-050IE	4.0A	+5.0V	10.0A	1.5A	+12.0V	3.0A	1.0A	-5.0V	1.5A
APS93VPT-050MI	4.0A	+5.0V	10.0A	0.8A	+24.0V	1.5A	1.0A	-12.0V	1.5A
APS93VPT-050KK	4.0A	+5.0V	10.0A	1.2A	+15.0V	2.4A	0.8A	-15.0V	1.2A
APS93VPT-033II	5.0A	+3.3V	12.0A	1.5A	+12.0V	3.0A	1.0A	-12.0V	1.5A
APS93VPT-033KK	5.0A	+3.3V	12.0A	1.2A	+15.0V	2.0A	0.8A	-15.0V	1.2A


Symbol: "●" OVP built-in "@ Adjustable "# Remote sensing "●" Post Regulator "■" couple common choke
 "●" Installed with OR-ing diodes.

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: PCB 358.0g(12.6 Oz.) U-Bracket 541.0g(19.0 Oz.)

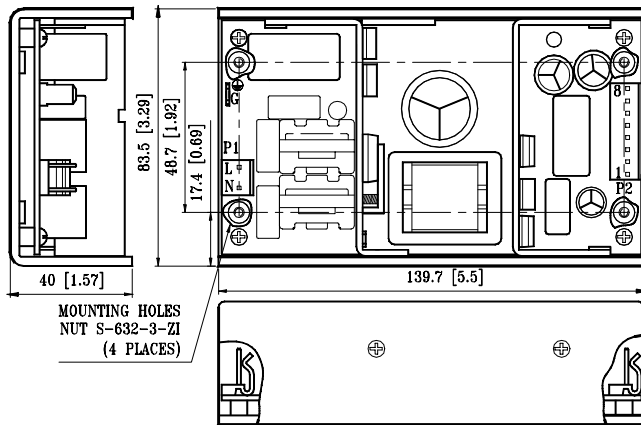

U-Bracket

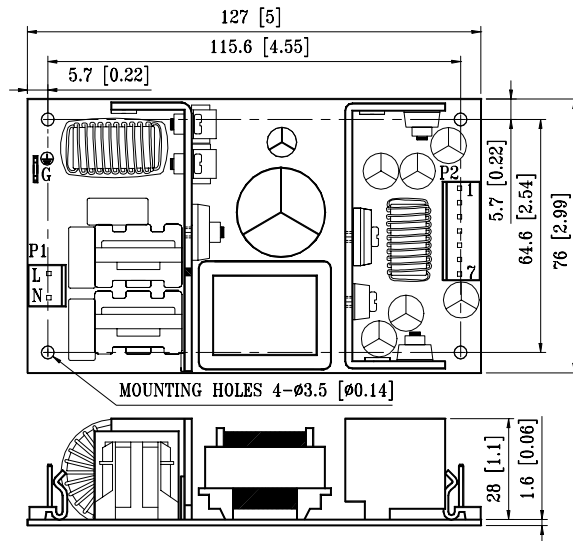

PCB

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	AC INPUT			DUAL OUTPUT		
	AC-L	AC-N	AC-G	VO1	VO2	DC COM
CNTR & PIN	L	N	GND	P2-7,8	P2-1	P2-2,3, 4,5,6

Mating connector: Molex 5196 series.

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	AC INPUT			DUAL OUTPUT			TRIPLE OUTPUT			
	AC-L	AC-N	AC-G	VO1	VO2	DC COM	VO1	VO2	VO3	DC COM
CNTR & PIN	P1-L	P1-N	G	P2-1,2	P2-6,7	P2-3, 4,5	P2-2,3	P2-7	P2-1	P2-4, 5,6

Mating connector: Molex 5196 series.