


MODEL NO. DESCRIPTION: APS05 AM – S/D – XXX YYY

Remark: Please specify the V/A ratings and consult for Model No

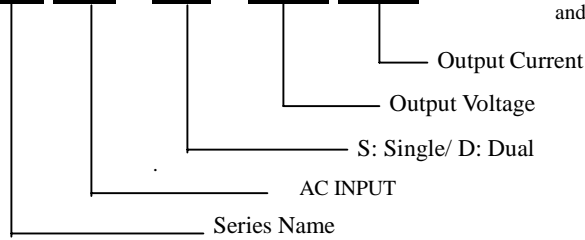

OUTPUT VOLTAGE/ CURRENT RATINGS CHART

SINGLE OUTPUT

MODEL NO.	VO1 @ ★		
	TYP.	VOLT.	PEAK
APS05AM-S-033133	1.33A	3.3V	1.59A
APS05AM-S-050100	1.00A	5.0V	1.20A
APS05AM-S-090060	0.60A	9.0V	0.72A
APS05AM-S-120045	0.45A	12.0V	0.54A
APS05AM-S-150036	0.36A	15.0V	0.43A
APS05AM-S-180030	0.30A	18.0V	0.36A
APS05AM-S-240022	0.22A	24.0V	0.26A


DUAL OUTPUT

MODEL NO.	+VO1 @ ★			-VO2 ¶		
	TYP.	VOLT.	MAX.	TYP.	VOLT.	MAX.
APS05AM-D-033064	0.64A	+3.3V	0.73A	0.64A	-3.3V	0.73A
APS05AM-D-050050	0.50A	+5.0V	0.57A	0.50A	-5.0V	0.57A
APS05AM-D-090030	0.30A	+9.0V	0.34A	0.30A	-9.0V	0.34A
APS05AM-D-120023	0.23A	+12.0V	0.26A	0.23A	-12.0V	0.26A
APS05AM-D-150018	0.18A	+15.0V	0.20A	0.18A	-15.0V	0.20A

Symbols: "★" OVP built-in. "@" Adjustable. "¶" Double Feedback.
 Note: (1). Max. (maximum load) is the continuous operating load of each rail, But the max. load of each rail can not be drawn from all outputs at the same time.
 (2). Peak output, less than 60 Sec. with duty cycle <10%.

MECHANICAL DIMENSIONS: MM [INCHES]

Weight: 107.0g (3.77 Oz.)

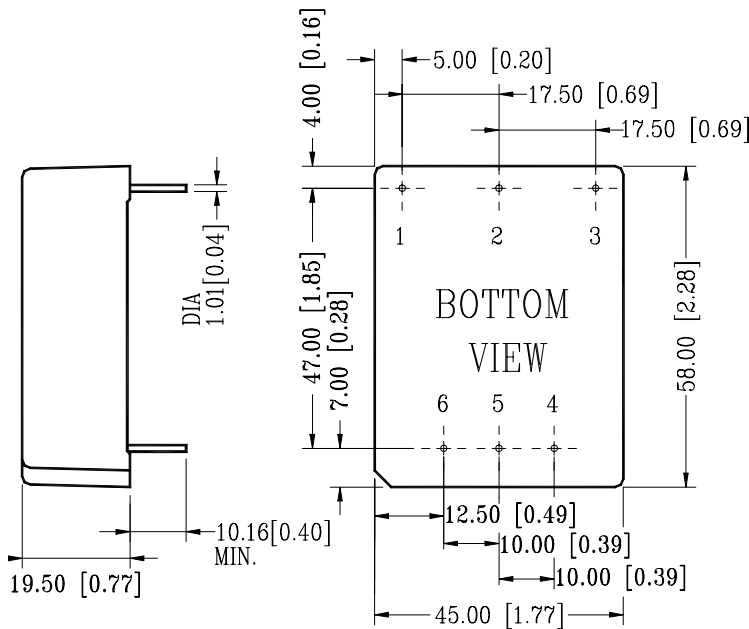

CASE SIZE: AM01

PIN ASSIGNMENT

PIN NO.	SINGLE	DUAL
PIN #1.	AC-GROUND	AC-GROUND
PIN #2.	AC-NEUTRAL	AC-NEUTRAL
PIN #3.	AC-LINE	AC-LINE
PIN #4.	+ VO1	+ VO1
PIN #5.	NC	DC-COM
PIN #6.	DC-COM	-VO2

DERATING CHART

