


MODEL NO. DESCRIPTION: APS16 AM - S/D - XXX YYY

Remark: Please specify the V/A ratings and consult for Model No

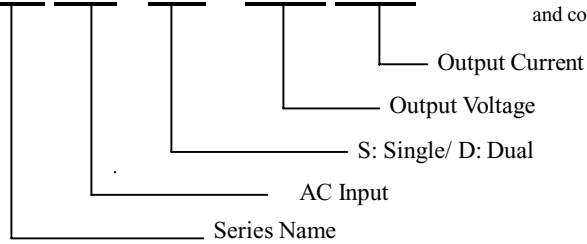

OUTPUT VOLTAGE/ CURRENT RATINGS CHART

SINGLE OUTPUT

MODEL NO.	VO1 ★ @		
	TYP.	VOLT.	PEAK
APS16AM-S-030370	3.70A	3.3V	4.44A
APS16AM-S-050300	3.00A	5.0V	3.60A
APS16AM-S-090170	1.70A	9.0V	2.04A
APS16AM-S-120135	1.35A	12.0V	1.62A
APS16AM-S-150110	1.10A	15.0V	1.32A
APS16AM-S-240070	0.70A	24.0V	0.84A
APS16AM-S-480035	0.35A	48.0V	0.42A


DUAL OUTPUT

MODEL NO.	+VO1 ★ @			-VO2 ¶		
	TYP.	VOLT.	MAX.	TYP.	VOLT.	MAX.
APS16AM-D-033180	1.80A	+3.3V	2.07A	1.80A	-3.3V	2.07A
APS16AM-D-050150	1.50A	+5.0V	1.72A	1.50A	-5.0A	1.72A
APS16AM-D-120068	0.68A	+12.0V	0.78A	0.68A	-12.0V	0.78A
APS16AM-D-150055	0.55A	+15.0V	0.63A	0.55A	-15.0V	0.63A

Symbols: "★" OVP built-in. "@" Adjustable. "¶" Double Feedback.
 Note: (1). Max. (maximum load) is the continuous operating load of each rail, But the max. load of each rail can not be drawn from all outputs at the same time.
 (2). Peak output, less than 60 Sec. with duty cycle <10%.

MECHANICAL DIMENSIONS: MM [INCHES]

Weight: 145.0g(5.11Oz)

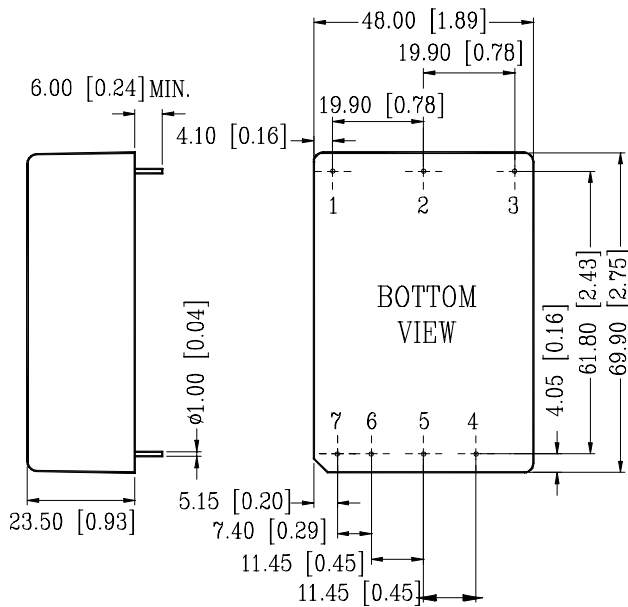

CASE SIZE: AM03

PIN ASSIGNMENT

PIN NO.	SINGLE	DUAL
PIN #1.	AC-GROUND	AC-GROUND
PIN #2.	AC-NEUTRAL	AC-NEUTRAL
PIN #3.	AC-LINE	AC-LINE
PIN #4.	+ VO1	+ VO1
PIN #5.	NC	DC-COM
PIN #6.	DC COM	-VO2
PIN #7.	Remote ON/OFF	Remote ON/OFF

DERATING CHART

