

REV. Status

REVISION -  
04/21/92 YN

REVISION A  
TEMECULA  
WAS CARSON  
REFORMATTED  
10/10/96 DS

AC-AC UL/CSA ADAPTOR 14VAC 850mA

A. Electrical specifications

1. Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
2. Output voltage and current: AC 14V 850mA

Vin	850mA Load	85mA Load
108	11.6 VAC MIN	16.9 VAC MIN
120	13.2-14.6 VAC	18.7 VAC MAX
132	-	-

NOTE: Specification applies after 10 minutes warm-up with 850mA load and at any operating temperature



3. Operating temperature: 0 ° C to +40 ° C
4. Storage temperature: -20 ° C to +85 ° C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 1500Vrms 1 minute @ input to output

B. Typical performance data test condition: Ta = +25° C, measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies


UL File No. E82180  
CSA File No. LR38236

D. Nameplate: Information is as follows:  
Metallic letters on a black background

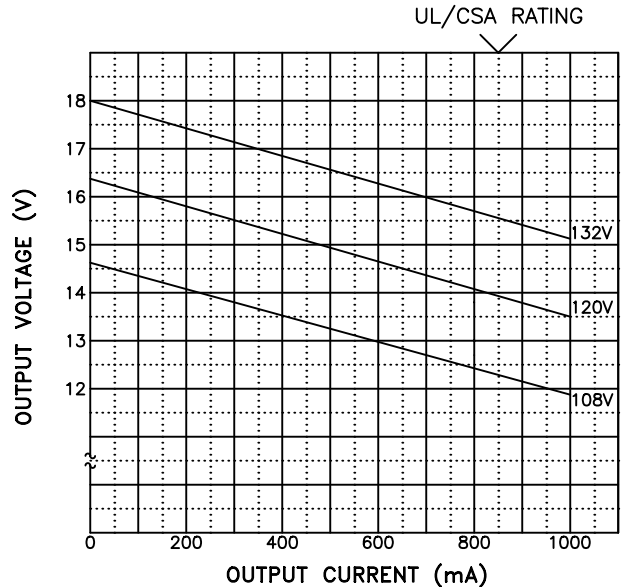

E. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

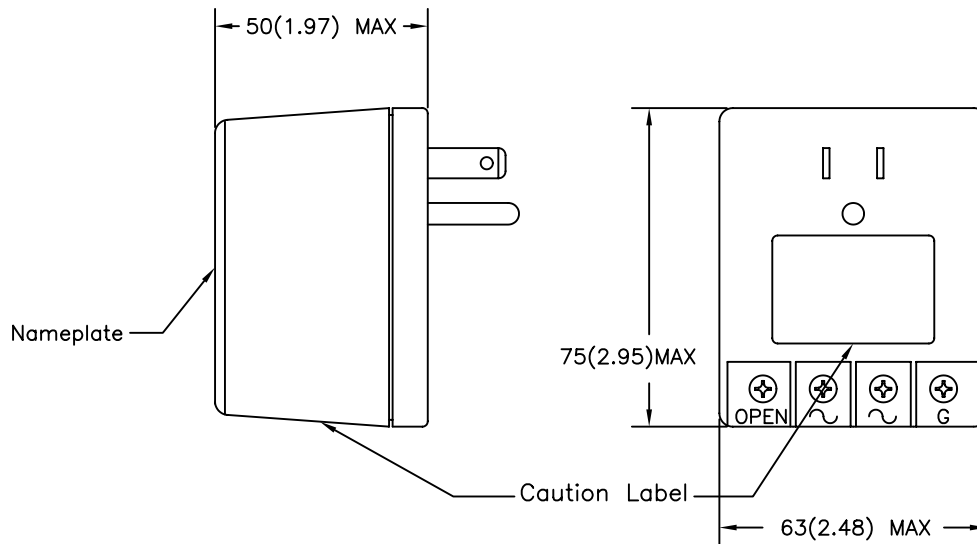

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO.  
P-A7-10658  
ACAD\PS\A7106581.DWG

REV  
A

UL/CSA AC 14V 850mA  
POWER SUPPLY

820A0062-03

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE  
SUBJECT TO CHANGE WITHOUT  
PRIOR NOTICE

**TAMURA CORPORATION OF AMERICA**  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.