

REV. Status

ISSUE 1  
4/21/92 YN

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: AC 16V at 750mA


V <sub>in</sub>	100% Load	10% Full Load
108	13.0 VAC MIN	-
120	14.9-16.5 VAC	18.9 VAC MAX
132	-	20.9 VAC MAX

NOTE: (1) Specified at 10 minutes warm-up with 750mA load  
(2) Specified at any combination of temperature or humidity within their respective limits


- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data;


Test Condition: T<sub>a</sub> = +25 ° C,  
measured at 10 minute warm-up  
with 750mA load

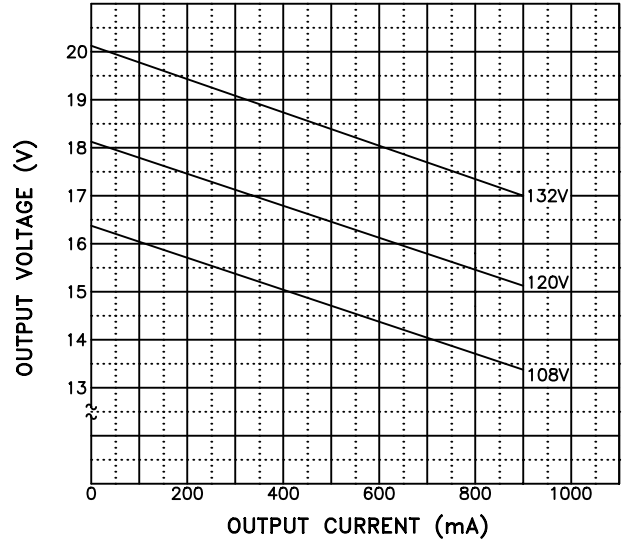

3. Schematic Diagram

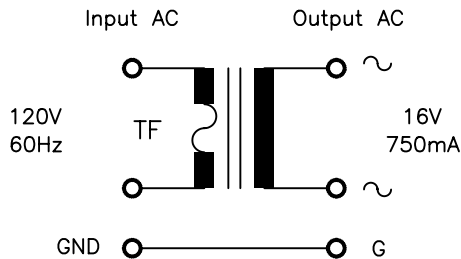

4. Mechanical Specifications, nameplate and safety approval

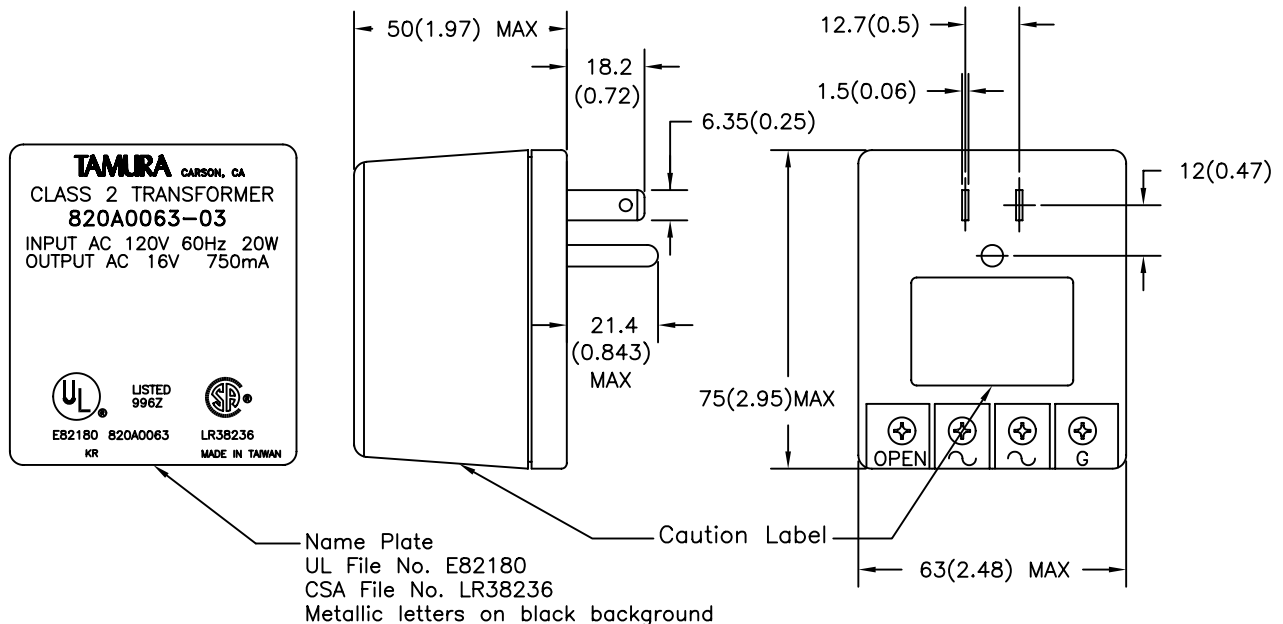

PREPARED BY: K. Georgeson ENGINEER:	DWG CONTROL NO. REV P-A7-10659 - (ACAD\PS\A7106591.DWG)	UL/CSA AC 16V 750mA POWER SUPPLY	820A0063-03
APPROVED: B. Malherbie M. Foster	CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	TAMURA CORPORATION OF AMERICA 1150 DOMINGUEZ STREET CARSON, CA., 90746 (310) 638-1790 FAX 3106389956	MODEL SPECIFICATION DIM: mm(In) SCL: NONE SH: 1 OF 1
<small>PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.</small>			