

REV. Status

ISSUE 1
04/21/92 YN

ISSUE 2
TEMECULA
WAS CARSON
REFORMATTED
03/13/96 DS

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: AC 18V 650mA

V _{in}	650mA Load	65mA Load
108	14.7 VAC MIN	21.8 VAC MIN
120	16.9-18.8 VAC	23.8 VAC MAX
132	-	-

NOTE: Specification applies after 10 minutes warm-up with 650mA load and at any operating temperature


- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data test condition: Ta = +25° C, measured after 10 minute warm-up with input at 120V 60Hz

3. Safety agencies


UL File No. E82180
CSA File No. LR38236

4. Nameplate: See drawing P-N1-10944 for detail

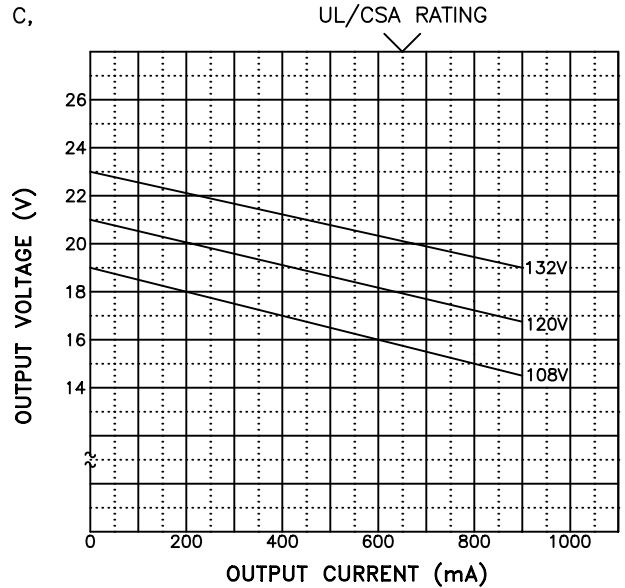

5. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

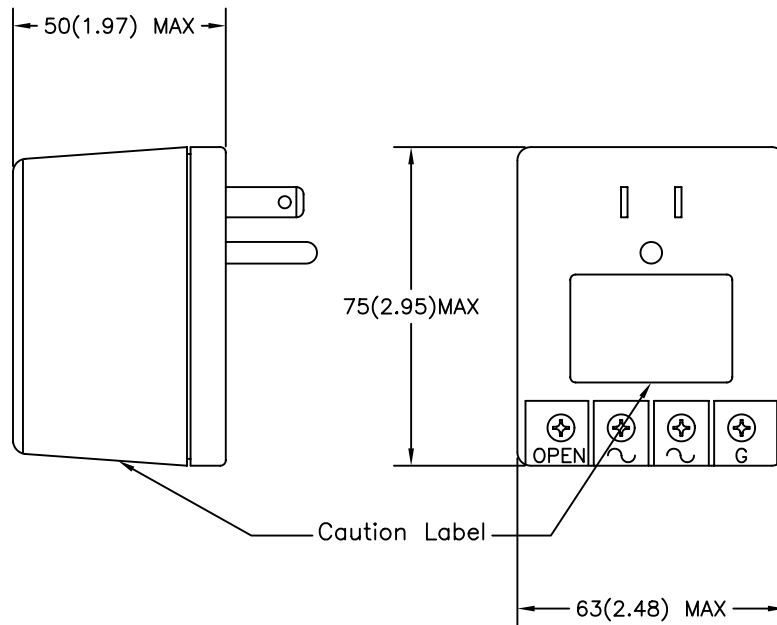

TOLERANCES (mm)

≤ 4	± 0.2
4 ≤ 20	± 0.3
20 ≤ 50	± 0.4

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

M. Ong

APPROVED:

M. Ong

DWG CONTROL NO.
P-A7-10660
ACAD\PS\A7106601.DWG

REV
A

UL/CSA AC 18V 650mA
CLASS 2 POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

820A0064-03

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.