

REV. Status

ISSUE 1
4/21/92 YN

1. Electrical specifications


- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: AC 24V at 500mA

V _{in}	100% Load	10% Full Load
108	19.6 VAC MIN	-
120	22.4-25.0 VAC	28.4 VAC MAX
132	-	31.3 VAC MAX

NOTE: Specification applies after 10 minutes warm-up with 500mA load and at any operating temperature

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output


2. Typical performance data test condition: T_a = +25 ° C measured after 10 minute warm-up with input at 120v 60Hz

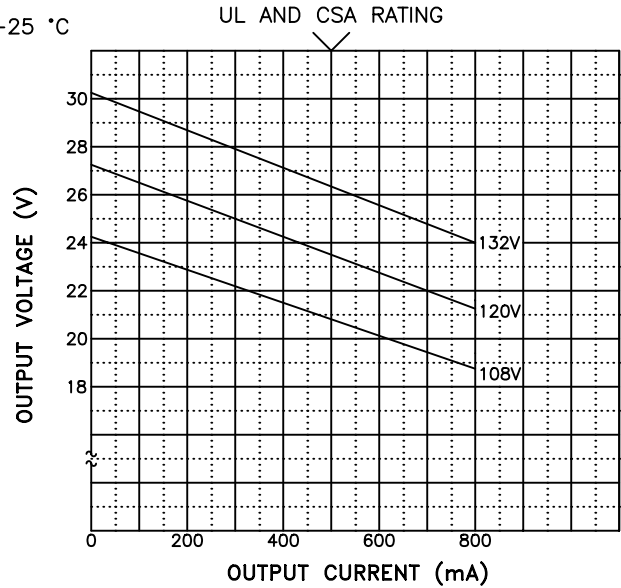

3. Safety agencies:
UL File No. E82180
CSA File No. LR38236

4. Nameplate: See drawing No. P-N1-10982

5. Mechanical Specifications

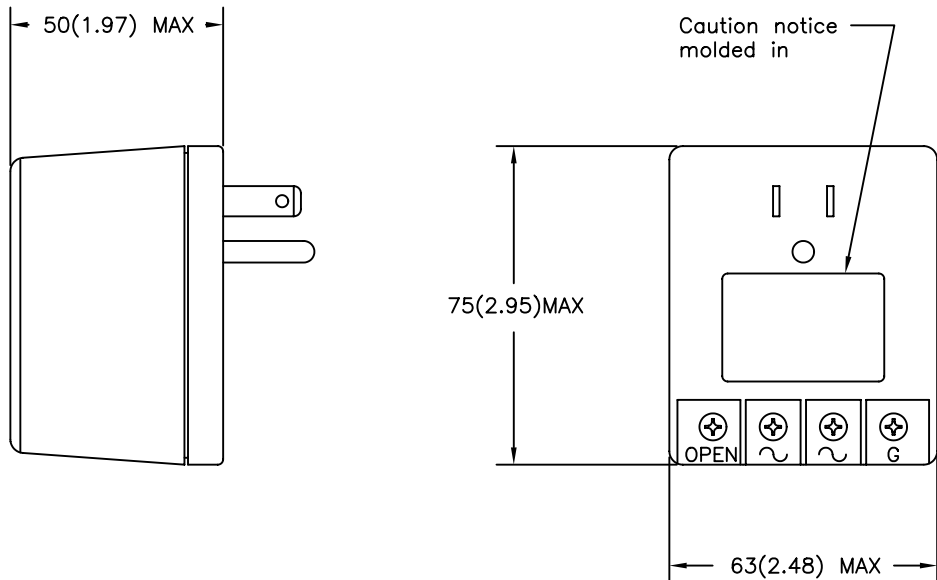

PREPARED BY: K. Georgeson ENGINEER:	DWG CONTROL NO. P-A7-10663 (ACAD\PS\A7106631.DWG)	REV -	UL/CSA AC 24V 500mA POWER SUPPLY	820A0067-03 MODEL SPECIFICATION
APPROVED: B. Malherbie M. Foster	CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE		TAMURA CORPORATION OF AMERICA 1150 DOMINGUEZ STREET CARSON, CA., 90746 (310) 638-1790 FAX 3106389956	
<small>PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.</small>				