

REVISION -
04/21/92 YN

REVISION A
REFORMATTED
TEMECULA
WAS CARSON
06/17/97 DS

A. Electrical specifications

1. Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
2. Output voltage and current: AC 10V at 1600mA

V _{in}	1600mA Load	160mA Load
108	8.3 VAC MIN	-
120	9.5-10.5 VAC	11.8 VAC MAX
132	-	13.0 VAC MAX

NOTE: Specification applies after 10 minutes warm-up with 1600mA load and at any operating temperature



3. Operating temperature: 0 ° C to +40 ° C
4. Storage temperature: -20 ° C to +85 ° C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 1500Vrms 1 minute @ input to output
7. Input earth prong is connected to output "G" terminal

B. Typical performance data test condition: Ta = +25° C, measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies


UL File No. E82180
CSA File No. LR38236

D. Nameplate: Information is as follows:
Metallic letters on a black background

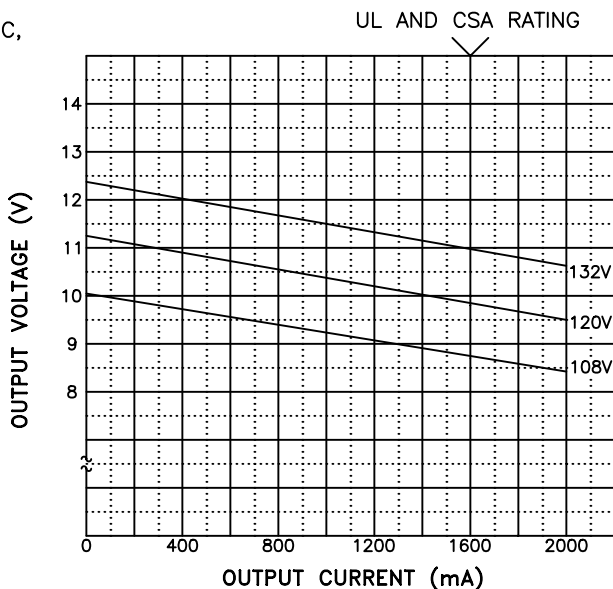

E. Mechanical Specifications;

All dimensions shown are nominal unless otherwise specified

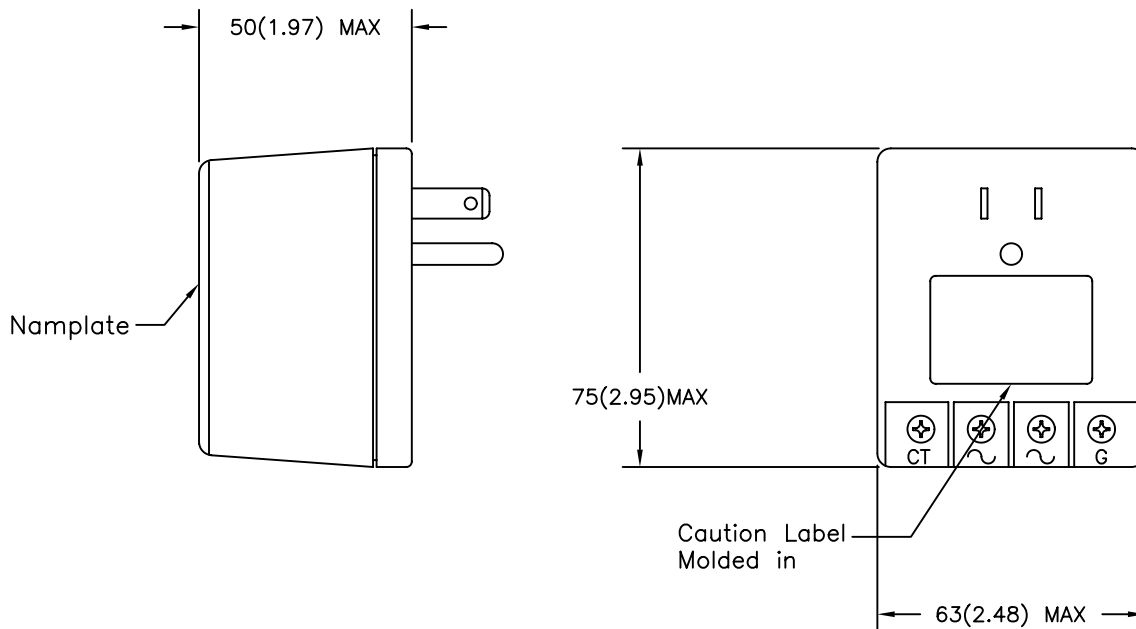

TOLERANCES (mm)

≤ 4	± 0.2
4 ≤ 20	± 0.3
20 ≤ 50	± 0.4

PREPARED BY:

K. Georgeson

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DRAWING CONTROL NO.
P-A7-10664
ACAD\PS\A7106641.DWG

REV
A

MODEL DESCRIPTION
UL/CSA AC 10VCT 1600mA
POWER SUPPLY

MODEL SPECIFICATION

825A0050-03

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.