

REV. Status
 REVISION -
 09/05/00 DS

CE DC 4.5V 400mA POWER SUPPLY

A. Electrical specifications


1. Input voltage: AC 230V ±10% 50Hz ±0.3Hz
2. Output voltage and current: DC 4.5V at 400mA

V _{in}	100% Load	10% Full Load
207	3.23VDC MIN	-
230	4.2-4.8VDC	7.56VDC MAX
253	-	8.40VDC MAX

NOTE: Specification applies after 10 minutes warm-up with 400mA load and at any operating temperature


3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 4000Vrms 1 minute @ input to output

B. Typical performance data test condition: T_a = +25°C, measured after 10 minute warm-up with input at 230V 50Hz

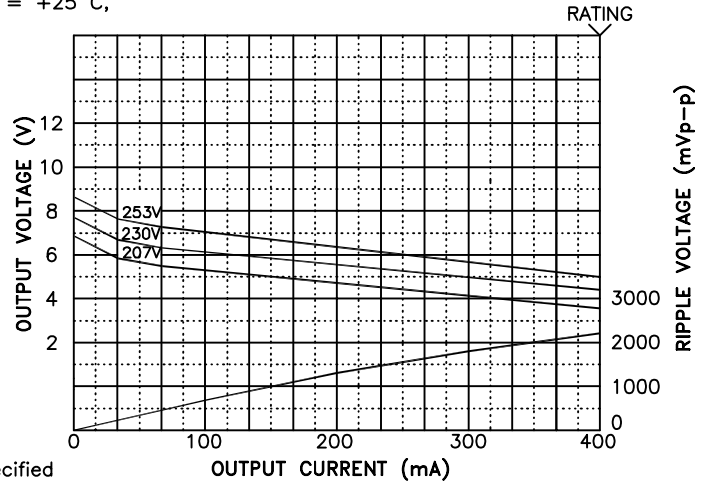


C. Safety agencies
 IEC 65.950, 742
 CE Marking

D. Nameplate:
 See drawing P-N1-12431 for details



E. Mechanical Specifications
 All dimensions nominal unless otherwise specified

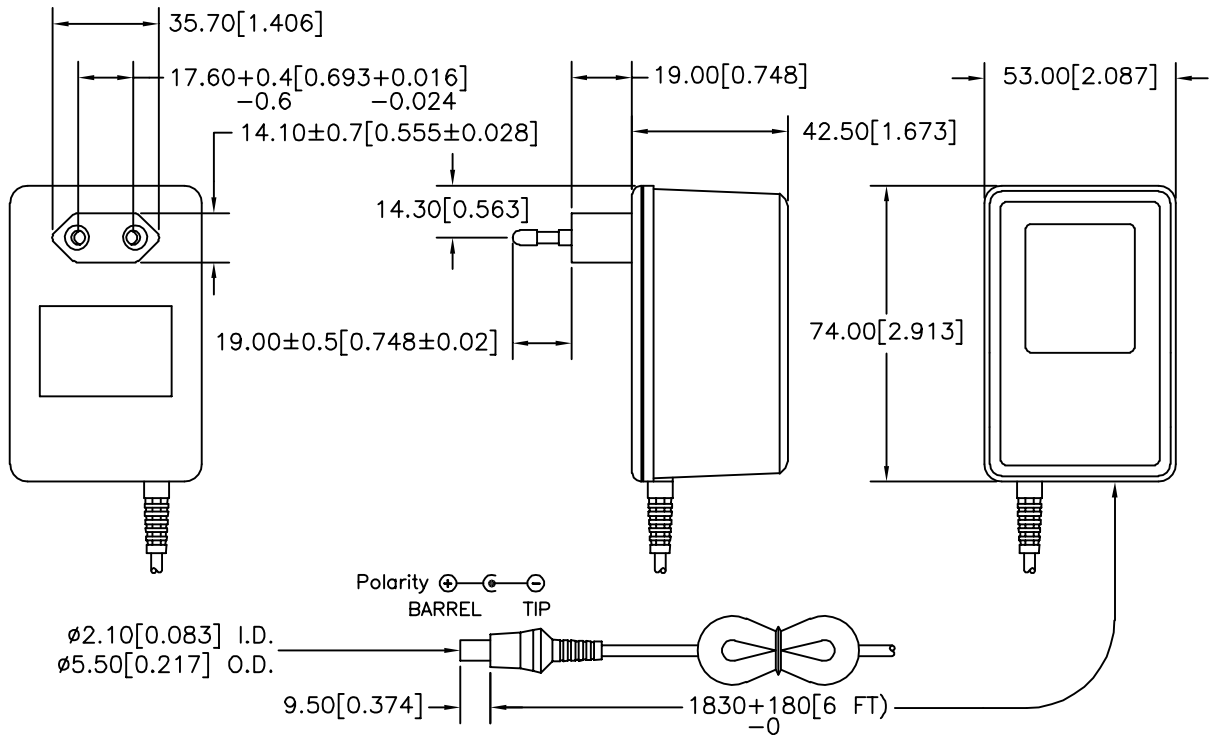

PREPARED BY:

D. Rund
 ENGINEER:

DWG CONTROL NO. P-A7-12569
 ACAD\PS\A7125691.DWG

REV -

CE DC 4.5V 400mA
 POWER SUPPLY

416FG41012

QUALITY CONTROL:

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
 (909) 699-1270 FAX 9096769482

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

APPROVED:

D. Kelley

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.