

REV. Status  
 REVISION  
 09/26/00 DS

CE DC 6V 300mA POWER SUPPLY

- A. Electrical specifications  
 1. Input voltage: AC 230V ±10% 50Hz ±0.3Hz  
 2. Output voltage and current: DC 6V at 300mA

V <sub>in</sub>	100% Load	10% Full Load
207	4.67VDC MIN	—
230	5.7–6.3VDC	8.82VDC MAX
253	—	10.08VDC MAX



NOTE: Specification applies after 10 minutes warm-up with 300mA load and at any operating temperature

3. Operating temperature: 0°C to +40°C  
 4. Storage temperature: -20°C to +85°C  
 5. Operating and Storage Humidity: 0 to 95% without condensation  
 6. Withstand voltage: AC 4000Vrms 1 minute @ input to output


- B. Typical performance data test condition: T<sub>a</sub> = +25°C, measured after 10 minute warm-up with input at 230V 50Hz

- C. Safety agencies  
 IEC 65.950, 742  
 CE Marking

- D. Nameplate:  
 See drawing P-N1-12430 for details

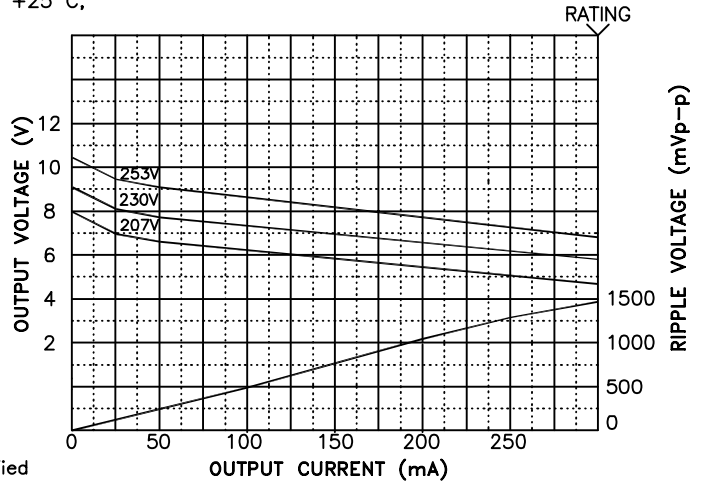

- E. Mechanical Specifications  
 All dimensions nominal unless otherwise specified

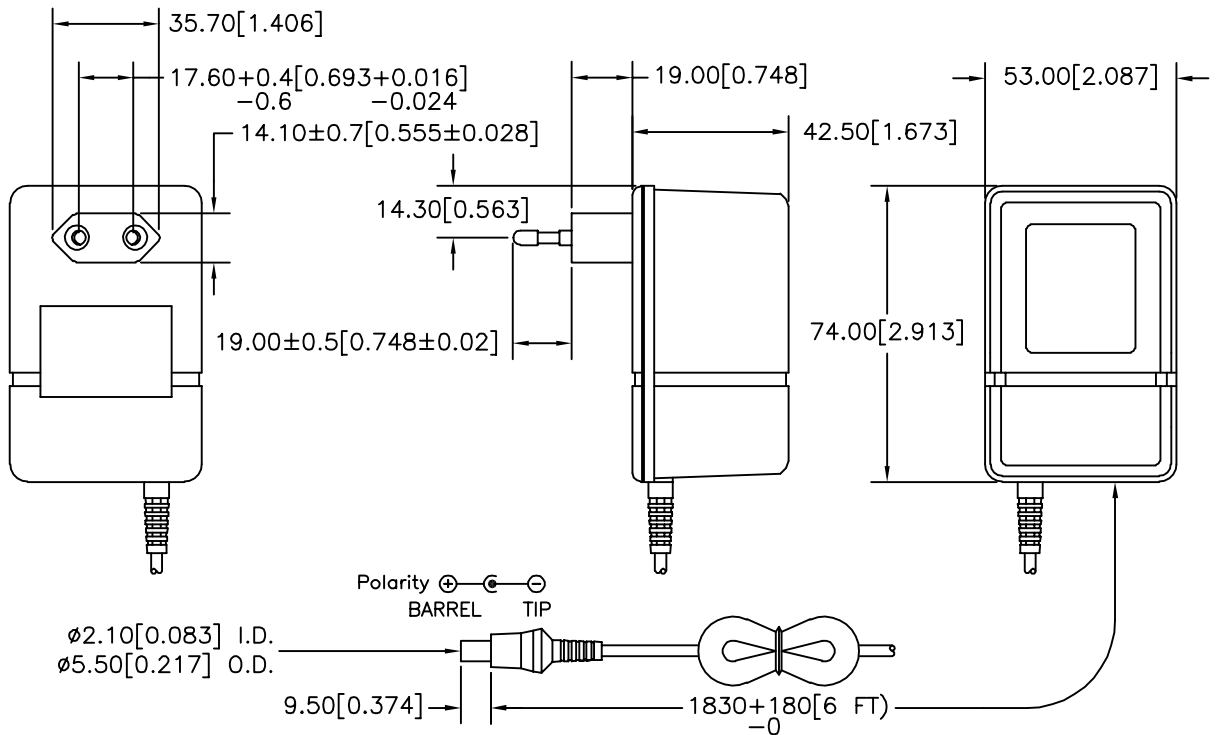

PREPARED BY:

D. Rund

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO.  
 P-A7-12570  
 ACAD\PS\A7125701.DWG

REV  
 —

CE DC 6V 300mA  
 POWER SUPPLY

416FG41014

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE  
 SUBJECT TO CHANGE WITHOUT  
 PRIOR NOTICE

**TAMURA CORPORATION OF AMERICA**  
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
 (909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.