

REV. Status
 REVISION -
 02/07/01 RJ

CE DC 12V 200mA POWER SUPPLY

A. Electrical specifications


1. Input voltage: AC 230V ±10% 50Hz ±0.3Hz
2. Output voltage and current: DC 12V at 200mA

V _{in}	100% Load	10% Full Load
207	9.69VDC MIN	-
230	11.4-12.6VDC	16.95VDC MAX
253	-	18.86VDC MAX

NOTE: Specification applies after 10 minutes warm-up with 200mA load and at any operating temperature


3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 4000Vrms 1 minute @ input to output

B. Typical performance data test condition: T_a = +25°C, measured after 10 minute warm-up with input at 230V 50Hz

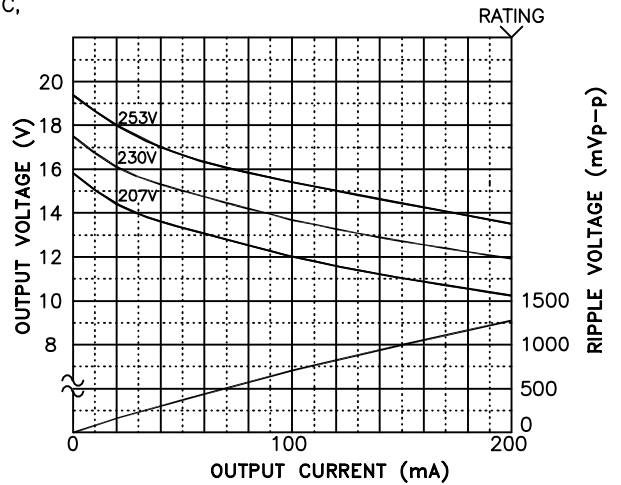


C. Safety agencies
 IEC 65.950, 742
 CE Marking

D. Nameplate:
 See drawing P-N1-12428 for details



E. Mechanical Specifications
 All dimensions nominal unless otherwise specified

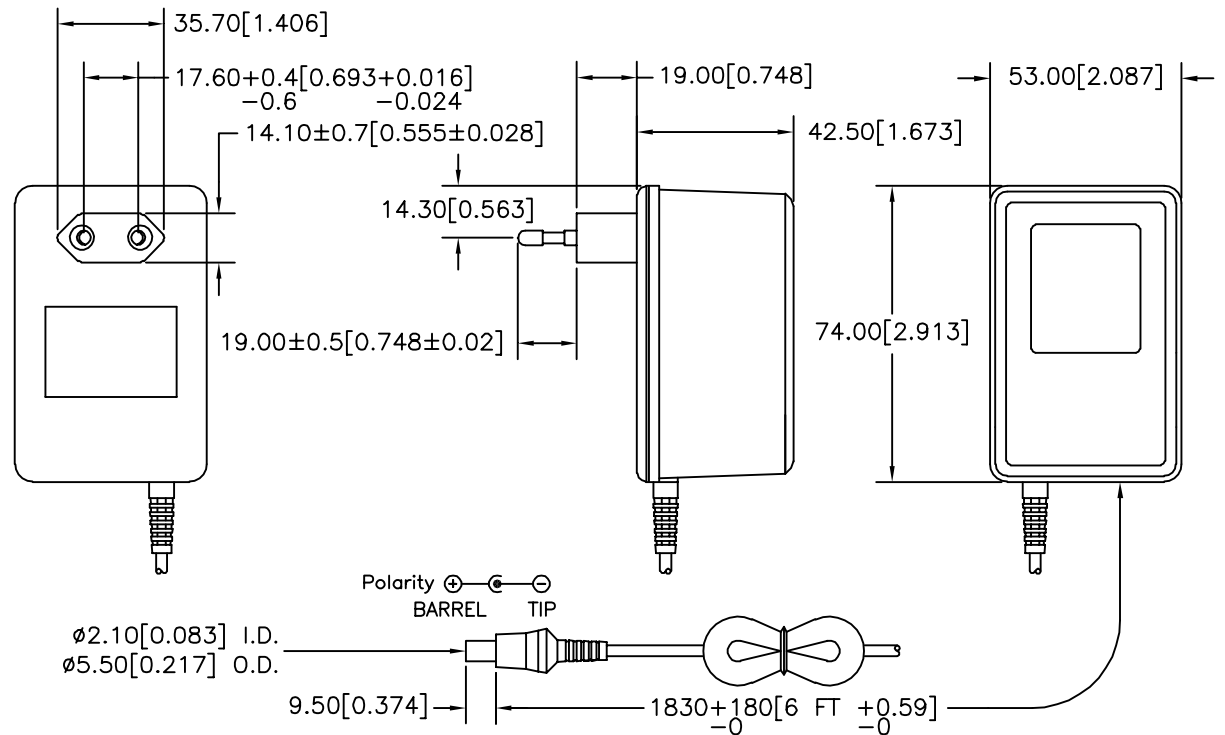

PREPARED BY:

D. Rund

ENGINEER:

R. Jones

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO.
 P-A7-12572
 ACAD\PS\A7125721.DWG

REV
 -

CE DC 12V 200mA
 POWER SUPPLY

416FG41018

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE
 SUBJECT TO CHANGE WITHOUT
 PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
 (909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.