

REV. Status
 REVISION -
 09/05/00 DS

CE DC 6V 800mA POWER SUPPLY

A. Electrical specifications

1. Input voltage: AC 230V ±10% 50Hz ±0.3Hz
2. Output voltage and current: DC 6V at 800mA

V _{in}	100% Load	10% Full Load
207	4.85VDC MIN	-
230	5.7~6.3VDC	9.75VDC MAX
253	-	10.85VDC MAX



NOTE: Specification applies after 10 minutes warm-up with 800mA load and at any operating temperature

3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 4000Vrms 1 minute @ input to output

B. Typical performance data test condition: T_a = +25°C, measured after 10 minute warm-up with input at 230V 50Hz


C. Safety agencies
 IEC 65.950, 742
 CE Marking

D. Nameplate:
 See drawing P-N1-12424 for details

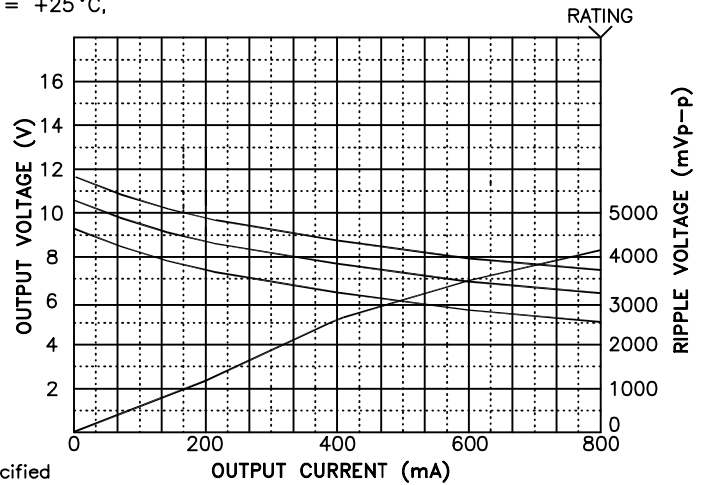

E. Mechanical Specifications

All dimensions nominal unless otherwise specified

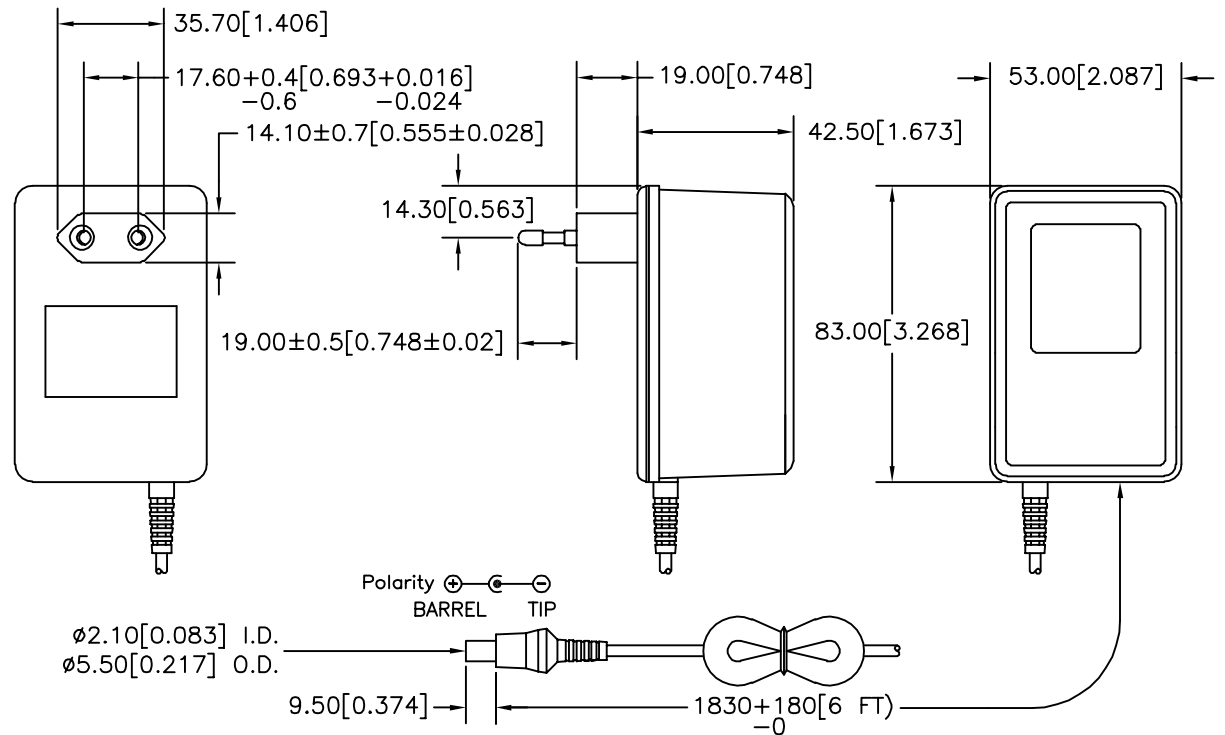

PREPARED BY:

D. Rund

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO.
 P-A7-12590
 ACAD\PS\A7125901.DWG

REV
 -

CE DC 6V 800mA
 POWER SUPPLY

425FG41613

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE
 SUBJECT TO CHANGE WITHOUT
 PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
 (909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.