

REV. Status

CE DC 14V 600mA POWER SUPPLY

REVISION -  
01/25/01 RJ

A. Electrical specifications


1. Input voltage: AC 230V ±10% 50Hz ±0.5Hz
2. Output voltage and current: DC 14V at 600mA

V <sub>in</sub>	100% Load	10% Full Load
207	11.50VDC MIN	-
230	13.3~14.7VDC	18.0VDC MAX
253	-	19.85VDC MAX

NOTE: Specification applies after 10 minutes warm-up with 600mA load and at any operating temperature


3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 4000Vrms 1 minute @ input to output

B. Typical performance data test condition: Ta = +25°C, measured after 10 minute warm-up with input at 230V 50Hz

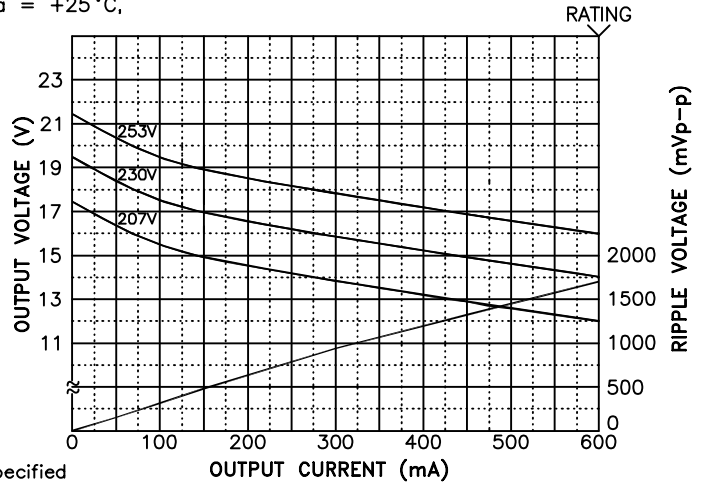


C. Safety agencies  
IEC 65.950, 742  
CE Marking

D. Nameplate:  
See drawing P-N1-12415 for details



E. Mechanical Specifications  
All dimensions nominal unless otherwise specified

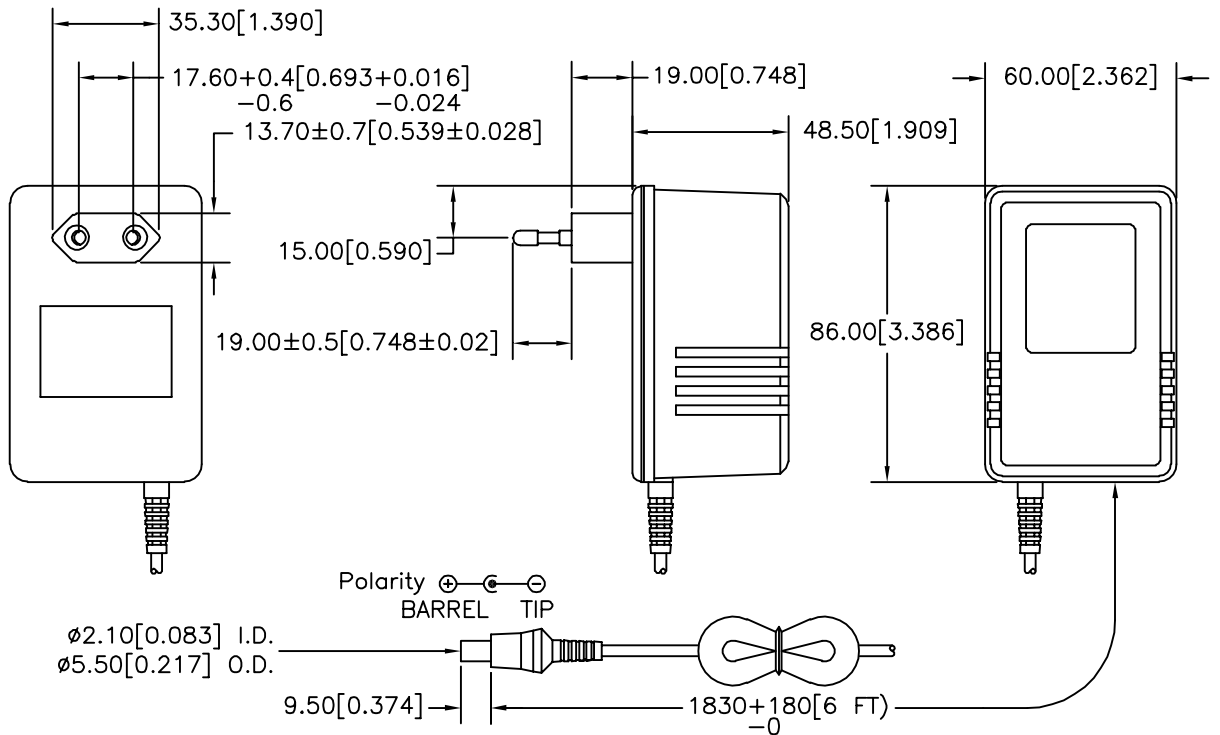

PREPARED BY:

D. Rund

ENGINEER:

R. Jones

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO.  
P-A7-12592  
ACAD\PS\A7125921.DWG

REV  
-

CE DC 14V 600mA  
POWER SUPPLY

825FG42505

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE  
SUBJECT TO CHANGE WITHOUT  
PRIOR NOTICE

**TAMURA CORPORATION OF AMERICA**  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.