

REV. Status

CE DC 6V 1200mA POWER SUPPLY

REVISION -  
08/04/00 DS

REVISION A  
CHANGED  
POLARITY ON  
NAMEPLATE  
08/28/00 DS

REVISION B  
DELETED FIMCO  
SAFETY AGENCY.  
08/31/00 DS

A. Electrical specifications

1. Input voltage: AC 230V ±10% 50Hz ±0.5Hz
2. Output voltage and current: DC 6V at 1200mA

V <sub>in</sub>	100% Load	10% Full Load
207	4.5VDC MIN	-
230	5.5-6.5VDC	8.5VDC MAX
253	-	9.6VDC MAX



NOTE: Specification applies after 10 minutes warm-up with 1200mA load and at any operating temperature

3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 4000Vrms 1 minute @ input to output

B. Typical performance data test condition: Ta = +25°C, measured after 10 minute warm-up with input at 230V 50Hz


C. Safety agencies  
IEC 65.950, 742  
CE Marking

D. Nameplate:  
See drawing P-N1-12419 for details

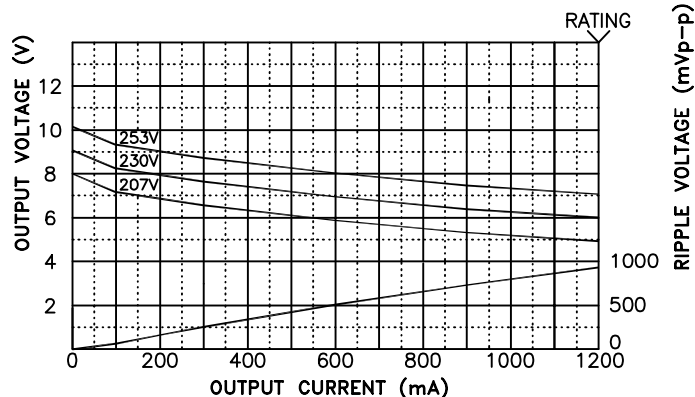

E. Mechanical Specifications

All dimensions nominal unless otherwise specified

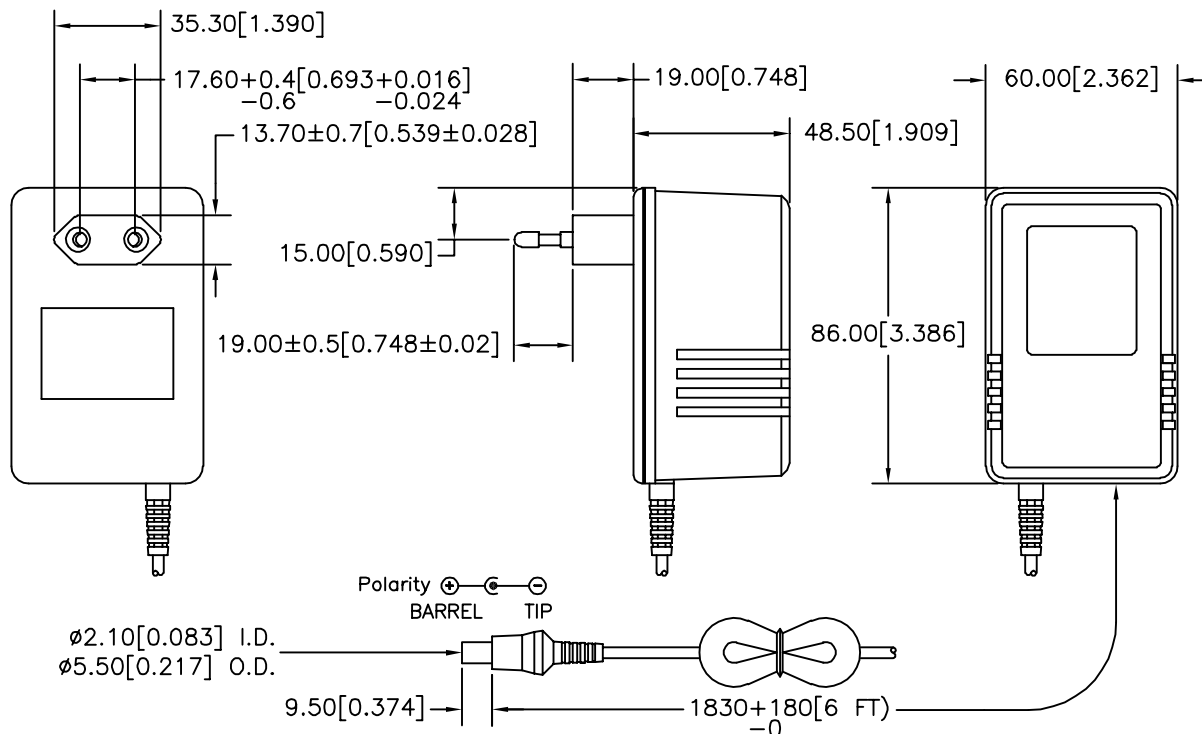

PREPARED BY:

D. Rund  
ENGINEER:

DWG CONTROL NO.  
P-A7-12555  
ACAD\PS\A7125551.DWG

REV  
B

CE DC 6V 1200mA  
POWER SUPPLY

825FG46500

QUALITY CONTROL:

CONTENTS OF THIS DRAWING ARE  
SUBJECT TO CHANGE WITHOUT  
PRIOR NOTICE

**TAMURA CORPORATION OF AMERICA**  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(909) 699-1270 FAX 9096769482

MODEL SPECIFICATION

D. Kelley  
APPROVED:

D. Kelley

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.