

REV. Status

ISSUE 1
5/26/92 YN

ISSUE 2
REFORMATTED.
TEMECULA
WAS CARSON
ADDED DIM
60(2.36) MAX
01/08/96 DS

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: DC 9V at 400mA

V _{in}	400mA Load	40mA Load
108	8.4 VDC MIN	-
120	8.5-9.3 VDC	-
132	-	9.6 VDC MAX

NOTE: Specification applies after 10 minutes warm-up with 400mA load and at any operating temperature

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output


2. Typical performance data test condition: T_a = +25 °C measured after 10 minute warm-up with input at 120V 60Hz

3. Safety agencies

UL file No. E82180
Transformer UL1411, recognition No. 4108
CSA File No. LR38236


4. Nameplate

See drawing P-N1-11095 for detail

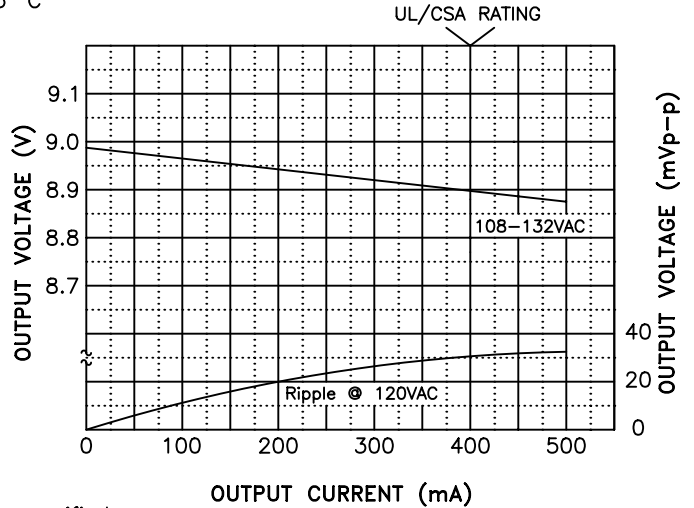

5. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

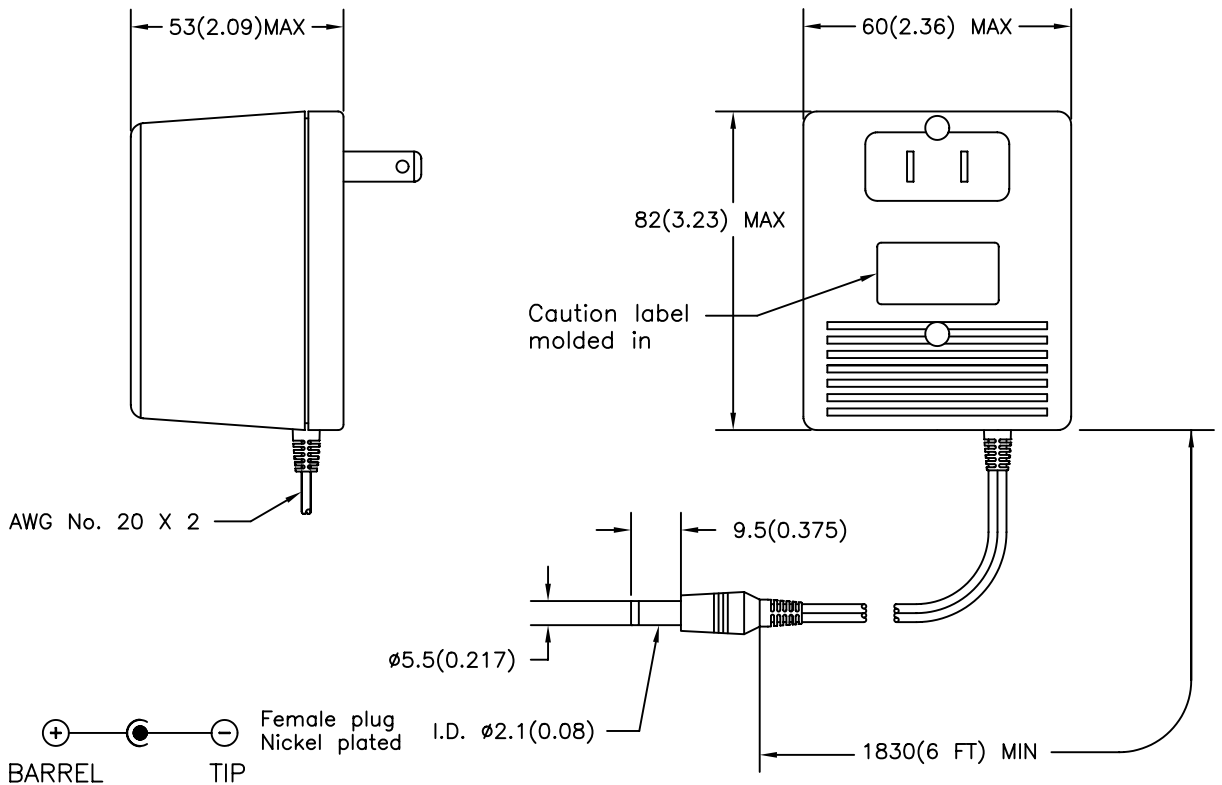

TOLERANCES (mm)

≤ 4 ± 0.2
4 ≤ 20 ± 0.3
20 ≤ 50 ± 0.4

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

V. Casey

APPROVED:

V. Casey

DWG CONTROL NO.
P-A7-10691
ACAD\PS\A7106911.DWG

REV
A

UL/CSA DC REG 9V 400mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

816AR4103

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.