

REV. Status

ISSUE 1
8/24/92 YN

ISSUE 2
REFORMATTED.
TEMECULA
WAS CARSON
01/08/96 DS

1. Electrical specifications
 - 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
 - 1.2 Output voltage and current: DC 12V at 300mA

V _{in}	300mA Load	30mA Load
108	11.2 VDC MIN	-
120	11.3-12.6 VDC	-
132	-	12.7 VDC MAX


NOTE: Specification applies after 10 minutes warm-up with 300mA load and at any operating temperature

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output


2. Typical performance data test condition: T_a = +25 °C measured after 10 minute warm-up with input at 120V 60Hz

3. Safety agencies
UL file No. E82180
Transformer UL1411, recognition No. 4104
CSA File No. LR38236

4. Nameplate
See drawing P-N1-11172 for detail

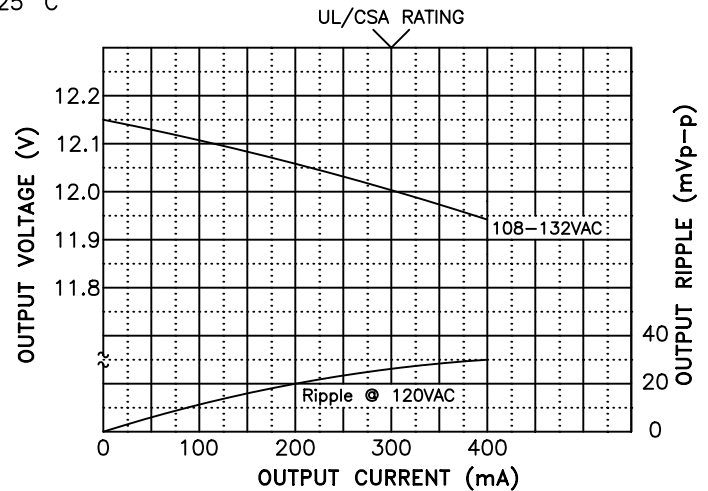

5. Mechanical Specifications
All dimensions shown are nominal unless otherwise specified

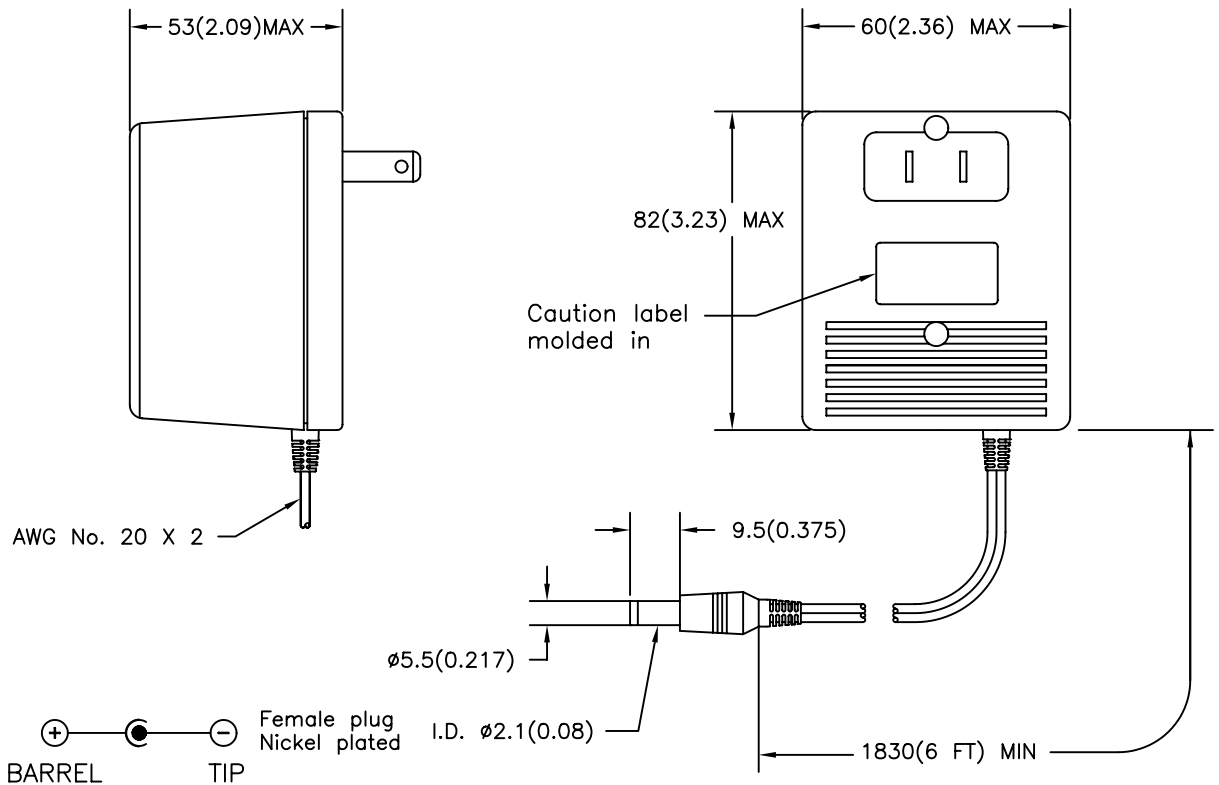

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

V. Casey

APPROVED:

V. Casey

DWG CONTROL NO.
P-A7-10749
ACAD\PS\A7107491.DWG

REV
A

UL/CSA DC REG 12V 300mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

816AR4104

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.