

REV. Status

ISSUE 1
01/29/92 YN

ISSUE 2
TEMECULA
WAS CARSON
02/16/96 DS

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: DC 6V at 600mA

| V _{in} | 600mA Load | 60mA Load |
|-----------------|-------------|--------------|
| 108 | 4.7 VDC MIN | - |
| 120 | 5.6-6.4 VDC | 9.8 VDC MAX |
| 132 | - | 10.9 VDC MAX |

NOTE: Specification applies after 10 minutes warm-up with 600mA load and at any operating temperature.

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data test Condition: Ta= +25 °C measured after 10 minute warm-up with input at 120V 60Hz



3. Safety agencies

UL File No. E82180
Transformer UL1411, recognition No. 4117
CSA File No. LR38236

4. Nameplate: See drawing P-N1-11060 for detail

5. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

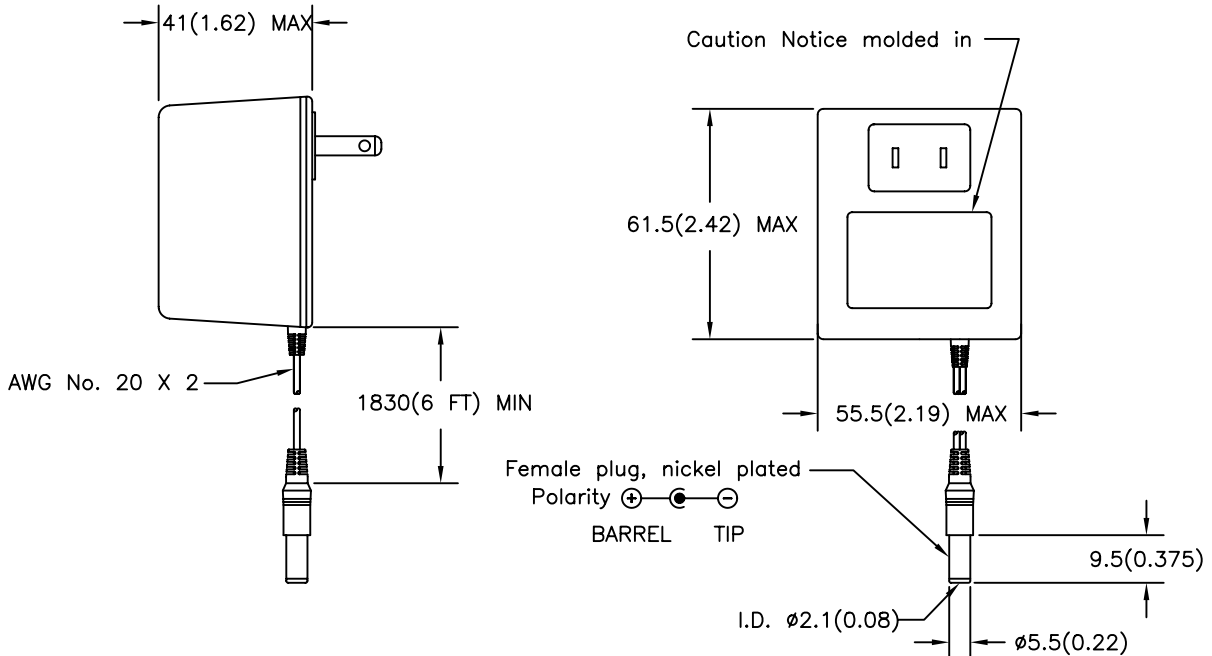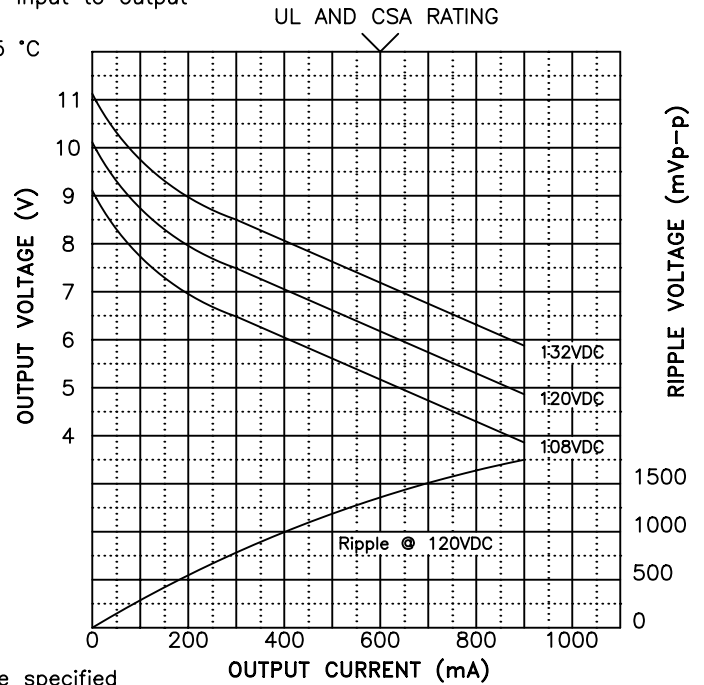

| TOLERANCES (mm) |
|-----------------|
| ≤ 4 ± 0.2 |
| 4 ≤ 20 ± 0.3 |
| 20 ≤ 50 ± 0.4 |

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

V. Casey

APPROVED:

V. Casey

DWG CONTROL NO. P-A7-00064
ACAD\PS\A7000641.DWG

REV A

UL/CSA DC 6V 600mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

416A2226

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.