

REV. Status

ISSUE 1
5/21/92 YN

ISSUE 2
TEMECULA
WAS CARSON
12/12/95 DS

ISSUE 3
ADDED REF:
MATING CONN...
03/26/96 DS

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: DC 9V at 500mA

V _{in}	500mA Load	50mA Load
108	7.2 VDC MIN	-
120	8.3-9.7 VDC	14.3 VDC MAX
132	-	15.9 VDC MAX

NOTE: Specification applies after 10 minutes warm-up with 500mA load and at any operating temperature.


- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data test Condition: Ta= +25 °C measured after 10 minute warm-up with input at 120V 60Hz

3. Safety agencies


UL File No. E82180
Transformer UL1411, recognition No. 4140
CSA File No. LR38236

4. Nameplate: See drawing P-N1-10933 for detail

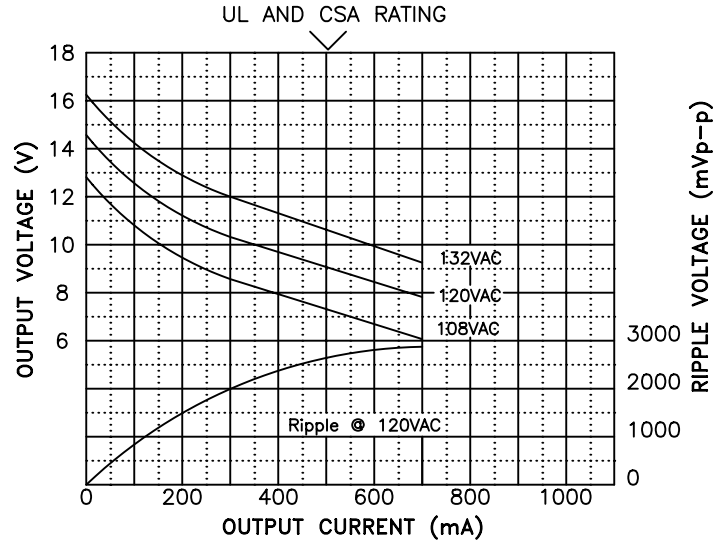

5. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

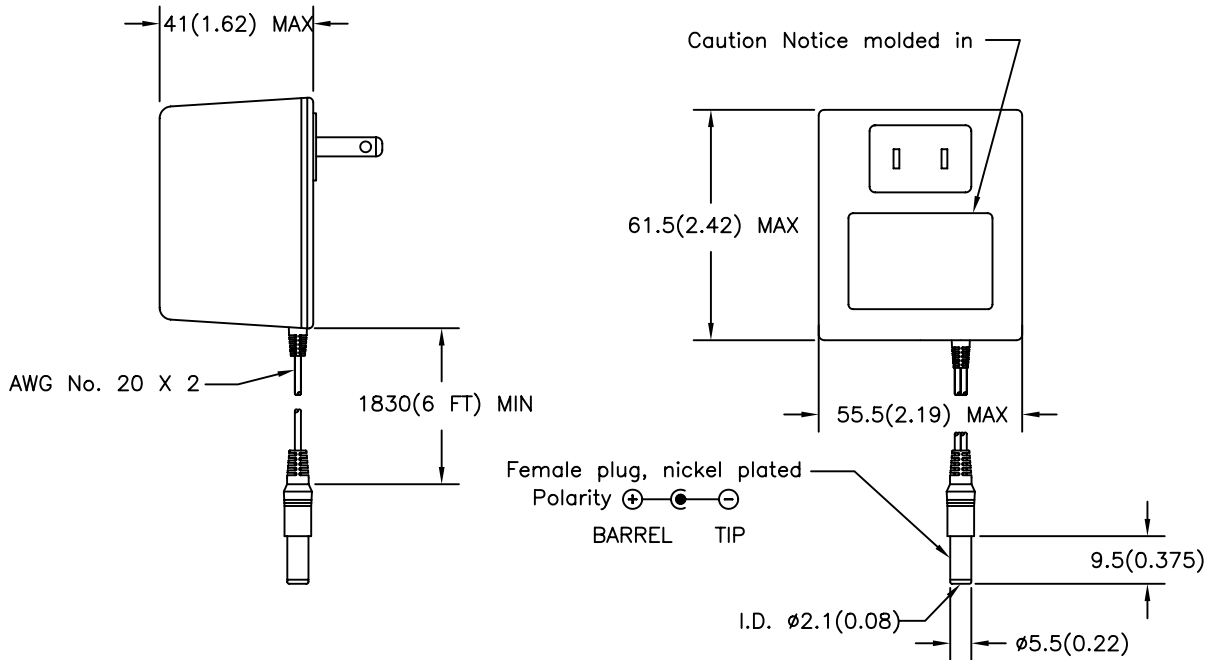

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

M. Ong

APPROVED:

M. Ong

REFERENCE: MATING CONNECTOR 722A SWITCHCRAFT, HEC0470-01-230 HOSHIDEN

DWG CONTROL NO. P-A7-00065 ACAD\PS\A7000651.DWG	REV B	UL/CSA DC 9V 500mA POWER SUPPLY	416A4136 MODEL SPECIFICATION		
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE		TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482			
<p>PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.</p>					