

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: DC 14V at 350mA


V _{in}	100% Load	10% Full Load
108	11.2 VDC MIN	-
120	13.1-14.8 VDC	20.6 VDC MAX
132	-	22.7 VDC MAX

NOTE: (1) Specified at 10 minutes warm-up with 350mA load
(2) Specified at any combination of temperature or humidity within their respective limits


- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data


Test Condition: T_a = +25 ° C,
measured at 10 minute warm-up
with 350mA load

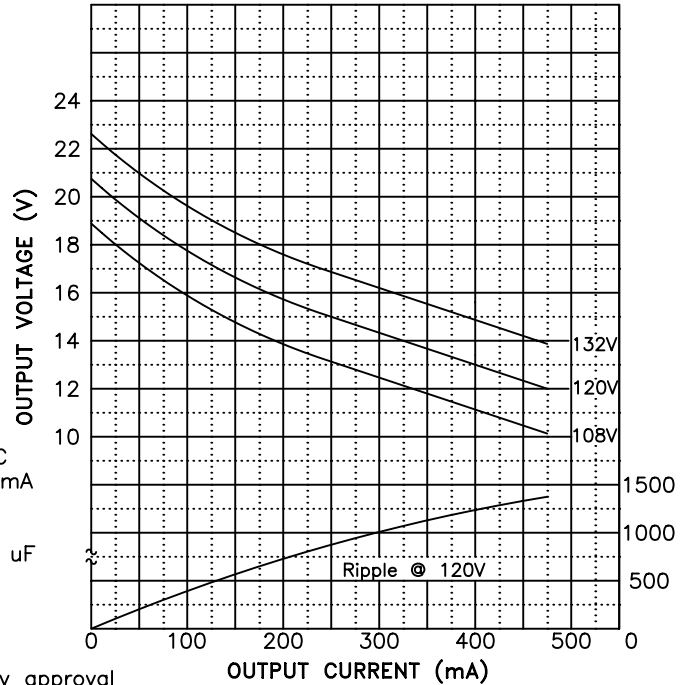

3. Schematic Diagram

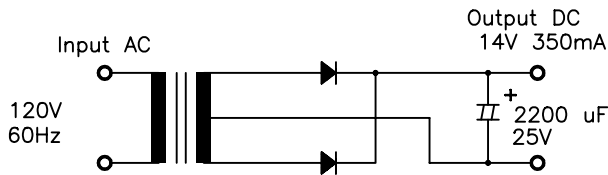

4. Mechanical Specifications, nameplate and safety approval

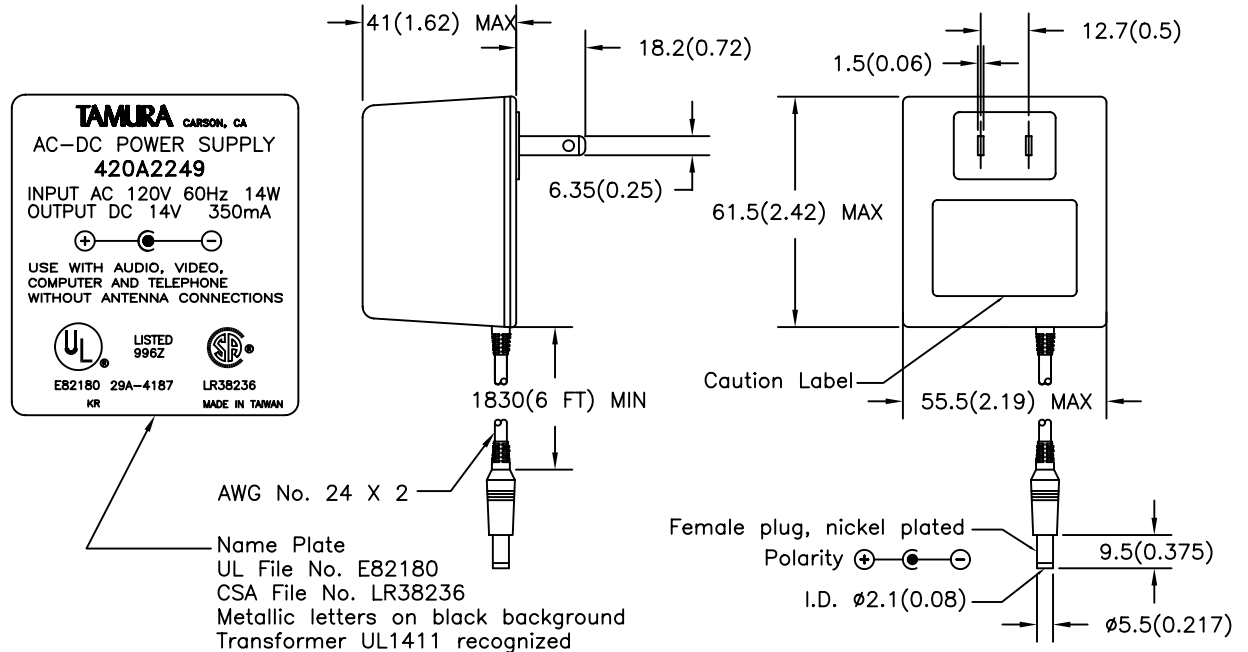

PREPARED BY: K. Georgeson ENGINEER:	DWG CONTROL NO. REV P-A7-00038 (ACAD\PS\A7000381.DWG) -	UL/CSA DC 14V 350mA POWER SUPPLY	420A2249 MODEL SPECIFICATION
APPROVED: B. Malherbie M. Foster	CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	TAMURA CORPORATION OF AMERICA 1150 DOMINGUEZ STREET CARSON, CA., 90746 (310) 638-1790 FAX 3106389956	

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.