

REV. Status

REVISION -
01/30/92 YN

REVISION A
TEMECULA
WAS CARSON
REFORMATTED
03/21/96 DS

REVISION B
#4 WAS
P-N1-11594
NOW
P-N1-11067

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: DC 20V at 280mA

V _{in}	280mA Load	28mA Full Load
108	15.7 VDC MIN	-
120	18.6-21.4 VDC	27.1 VDC MAX
132	-	29.8 VDC MAX


NOTE: Specification applies after 10 minutes warm-up with 280mA load and at any operating temperature

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data test condition: Ta = +25 ° C measured after 10 minute warm-up with input at 120V 60Hz



3. Safety agencies
UL file No. E82180
Transformer UL1411, recognition No. 4191H
CSA File No. LR38236

4. Nameplate; See drawing P-N1-11067 for detail

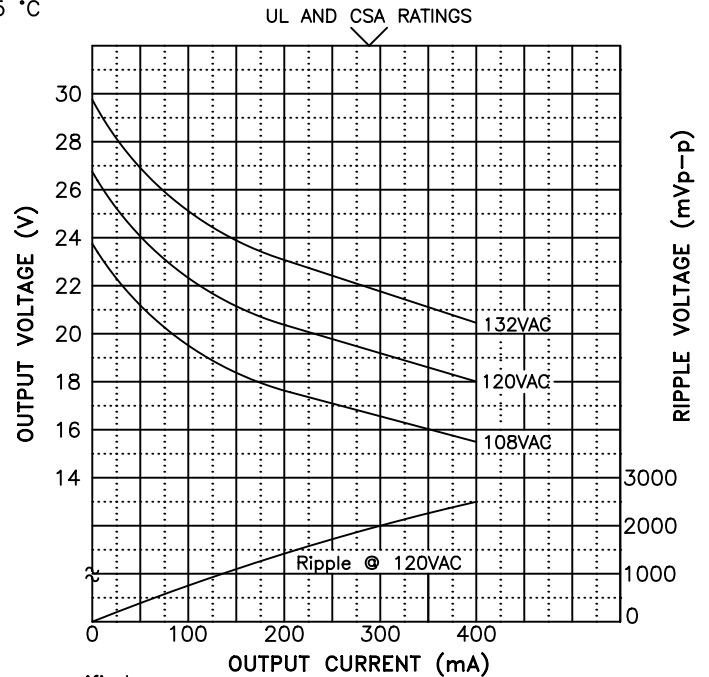

5. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

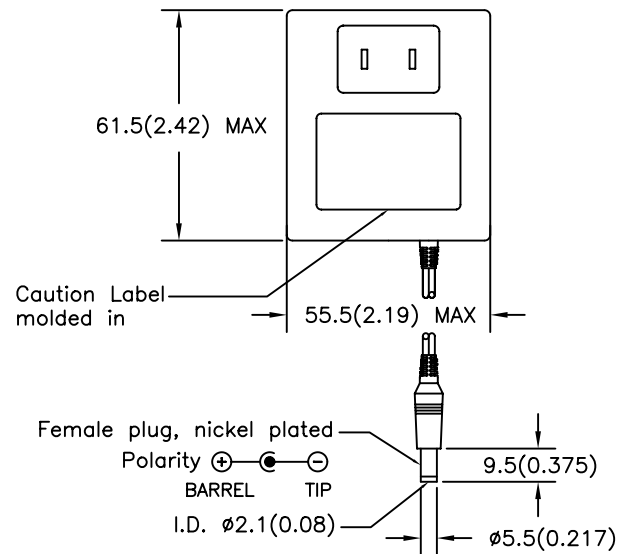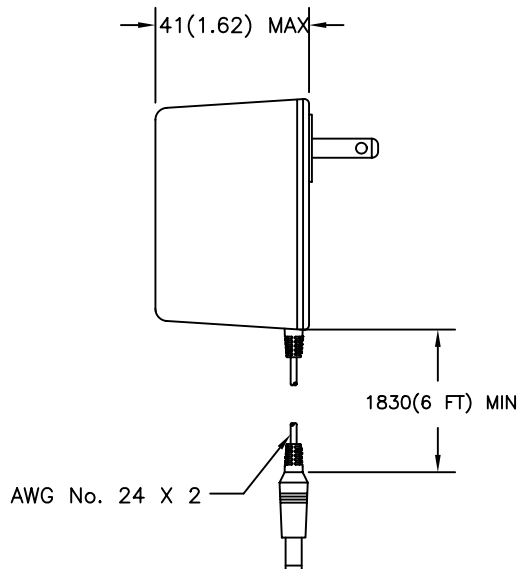

REFERENCE: MATING CONNECTOR 722A SWITCHCRAFT, HEC0470-01-230 HOSHIDEN

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

M. Ong

APPROVED:

M. Ong

DWG CONTROL NO. P-A7-00039
ACAD\PS\A7000391.DWG

REV A

UL/CSA DC 20V 280mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

420A4143

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.