

REV. Status

ISSUE 1  
3/2/792 YN

ISSUE 2  
TEMECULA  
WAS CARSON  
UPDATED FORMAT  
4/11/94 DS

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: 12V at 1000mA

Vin	100% Load	100mA Load
108V	9.5 VDC MIN	--
120V	11.4-12.6 VDC	16.7 VDC MAX
132V	--	18.5 VDC MAX

NOTE: Specification applies after 10 minutes warm-up with 1000mA load and at any operating temperature.

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data test Condition: Ta= +25 °C measured after 10 minute warm-up with input at 120V 60Hz




3. Safety agencies

UL File No. E50290  
CSA File No. LR62147

4. Nameplate: See drawing P-N1-11231 for detail

5. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

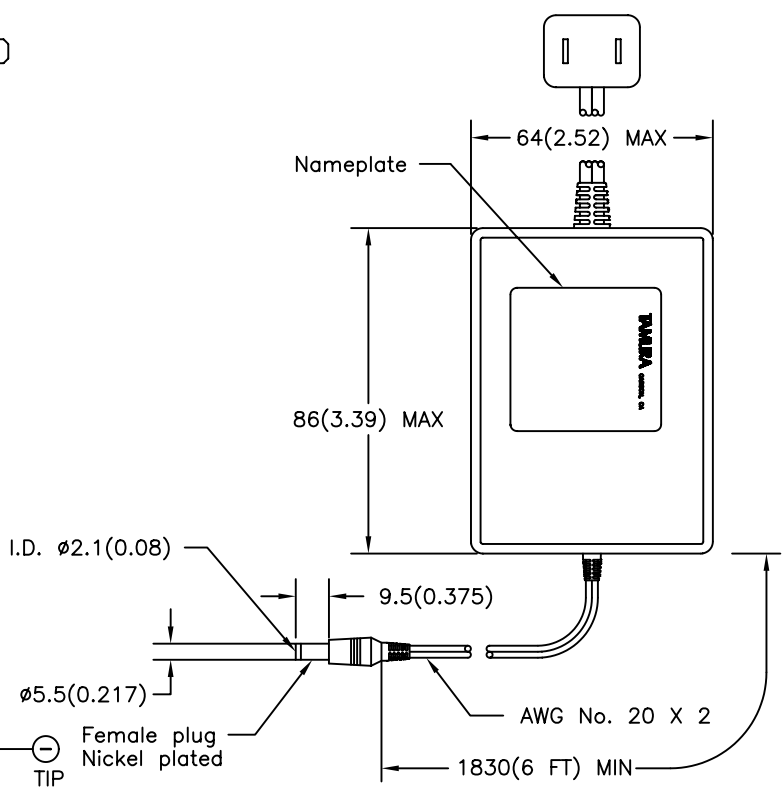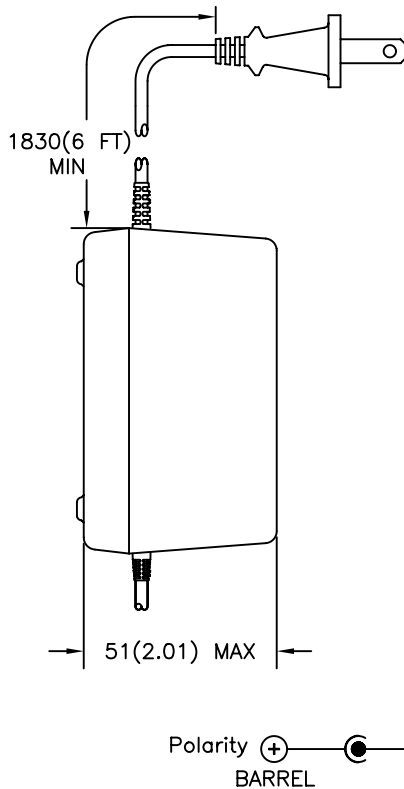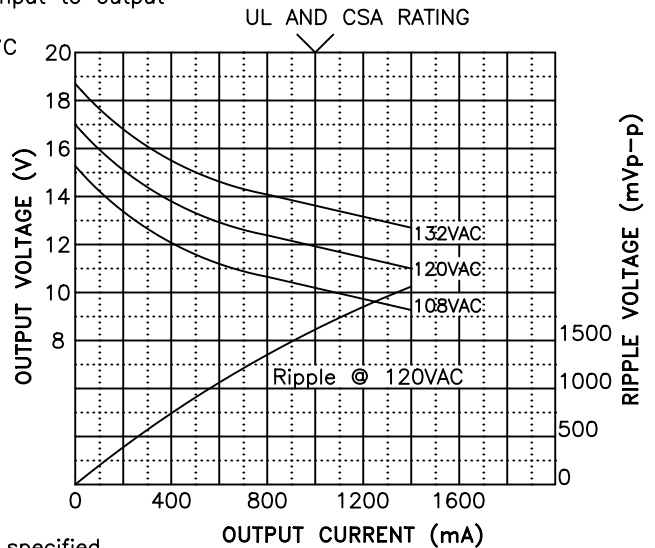

PREPARED BY:

DWG CONTROL NO. P-A7-00074  
ACAD\PS\A7000741.DWG

REV

A

UL/CSA DC 12V 1000mA  
POWER SUPPLY

K. Brennan

ENGINEER:

D. Suzuki

APPROVED:

V. Casey

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

**TAMURA CORPORATION OF AMERICA**  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(909) 699-1270 FAX 9096769482

521A4317

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.