

REV. Status

REVISION -
2/5/92 YN

REVISION A
TEMECULA
WAS CARSON
UPDATED FORMAT
8/28/95 TS

REVISION B
ADDED NOTE
MATING CONN...
ADDED NAMEPLATE
06/11/96 DS

1. Electrical specifications

- 1.1 Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
- 1.2 Output voltage and current: 13.5V at 1500mA

Vin	100% Load	10% Full Load
108V	11.0 VDC MIN	--
120V	12.8-14.2 VDC	17.7 VDC MAX
132V	--	19.7 VDC MAX



NOTE: Specification applies after 10 minutes warm-up with 1500mA load and at any operating temperature.

- 1.3 Operating temperature: 0 ° C to +40 ° C
- 1.4 Storage temperature: -20 ° C to +85 ° C
- 1.5 Operating and Storage Humidity: 0 to 95% without condensation
- 1.6 Withstand voltage: AC 1500Vrms 1 minute @ input to output

2. Typical performance data test Condition: Ta= +25 ° C measured after 10 minute warm-up with input at 120V 60Hz


3. Safety agencies
UL File No. E50290
CSA File No. LR62147

4. Nameplate: Information is as follows: Metallic letters on a black background

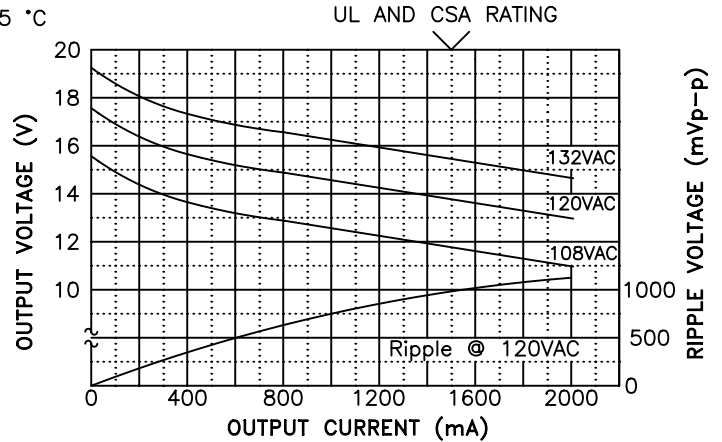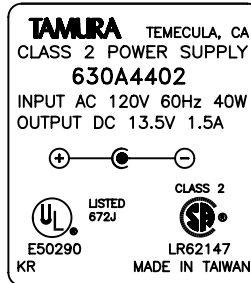

5. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

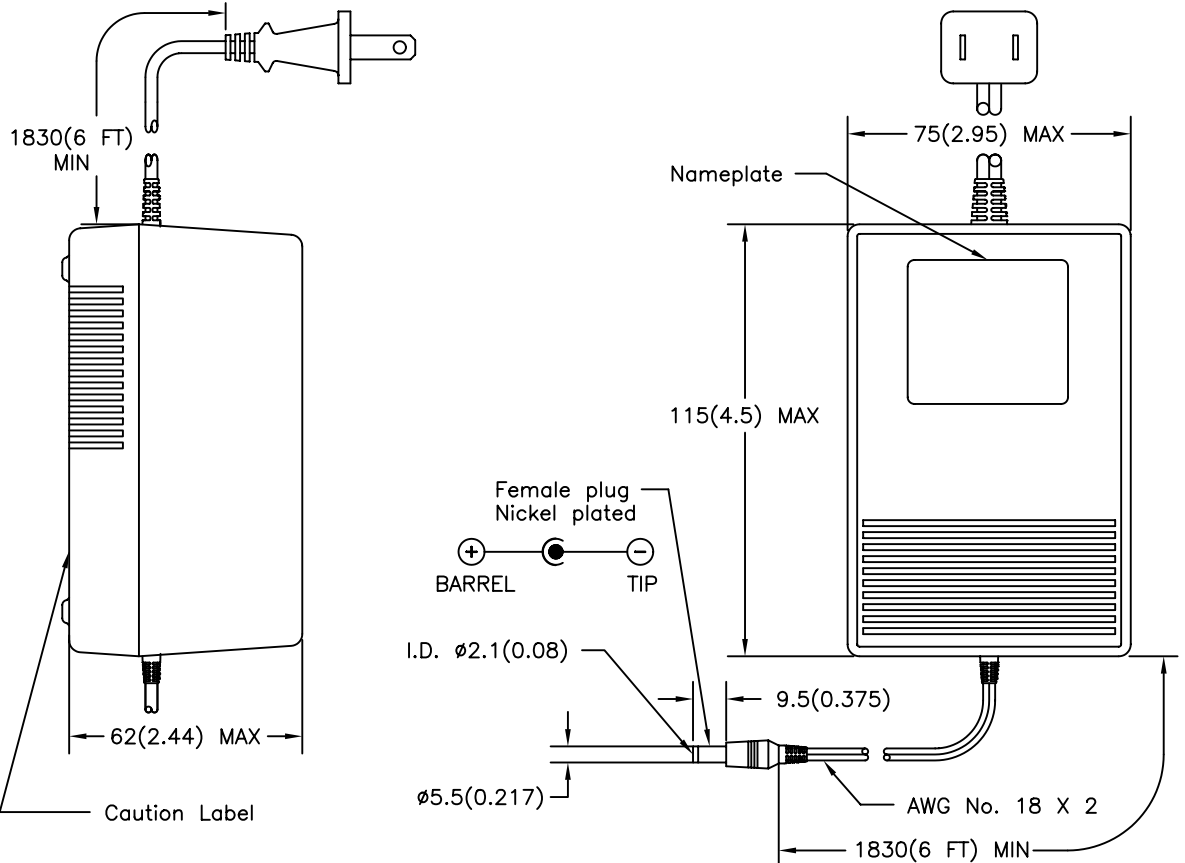

PREPARED BY:

K. Brennan

REFERENCE: MATING CONNECTOR 722A SWITCHCRAFT, HEC0470-01-230 HOSHIDEN

ENGINEER:

DWG CONTROL NO. P-A7-10562
ACAD\PS\A7105621.DWG

REV B

UL/CSA DC 13.5V 1500mA
POWER SUPPLY

D. Suzuki

QUALITY CONTROL:

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

630A4402

MODEL SPECIFICATION

D. Kelley

DIM: mm(In) SCL: NONE SH: 1 OF 1

APPROVED:

M. Ong

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.