

REVISION -  
11/29/01 RJ

REVISION A  
CHANGED A.6  
AND DIMS.  
04/01/02 RJ

- A. Electrical specifications
1. Input voltage: AC 120V ±10% 60Hz ±0.5Hz
  2. Output voltage and current: AC 24V at 750mA

V <sub>in</sub>	100% Load	No Load
108	19.0VAC MIN	-
120	23.5-24.5VAC	28.0VAC MAX
132	-	31.0VAC MAX


NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.

3. Operating temperature: -10°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: 1500Vrms 1 minute @ input to output


B. Typical performance data test Condition:  
T<sub>a</sub> = +25°C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies  
UL and cUL File No. E218172


D. Nameplate: Information is as follows:  
Metallic letters on a black background



TYPICAL PERFORMANCE CHART

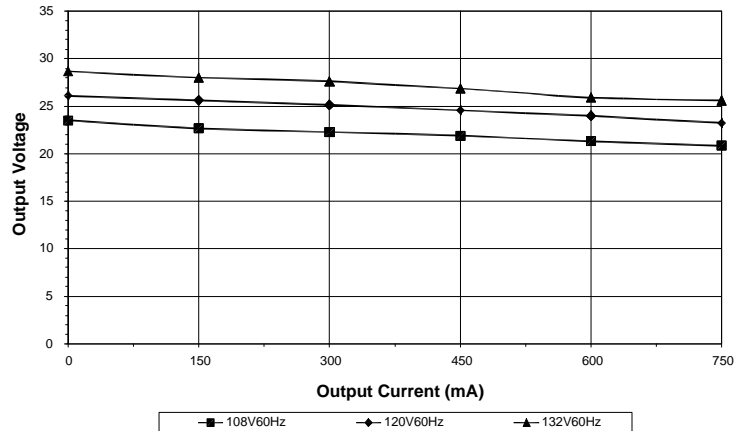

E. Mechanical Specifications  
All dimensions shown are nominal unless otherwise specified

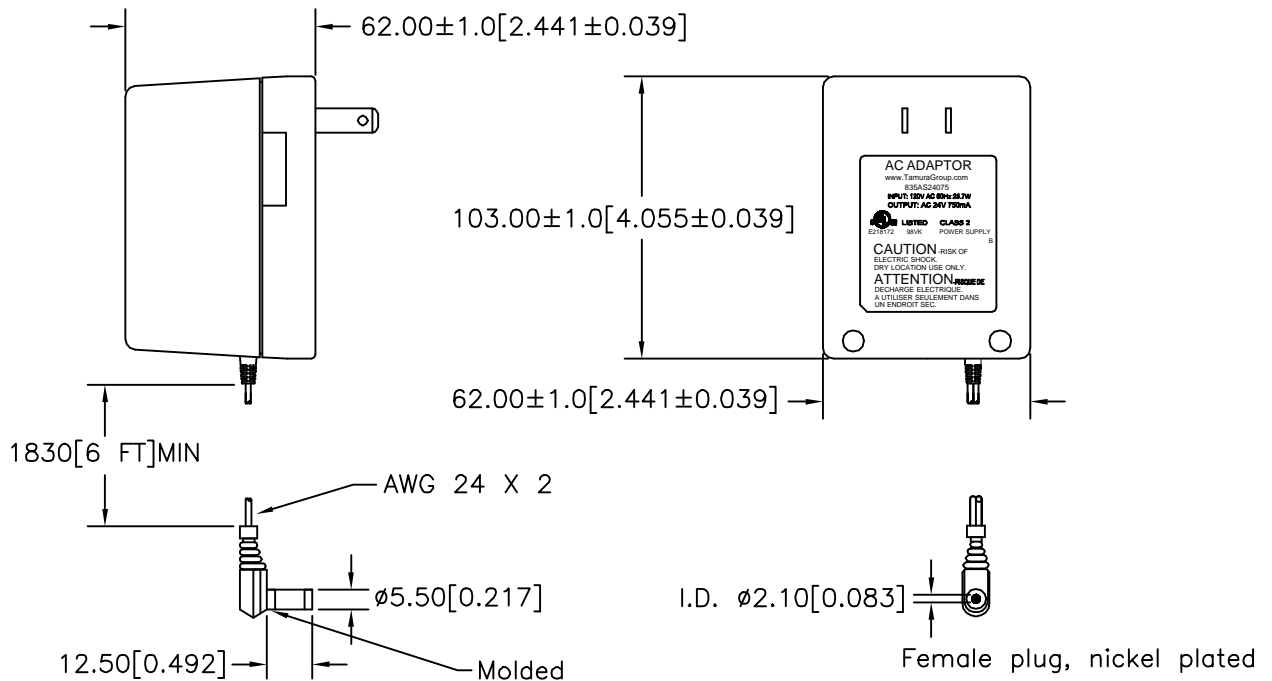

PREPARED BY:

D. Rund

ENGINEER:

R. Jones

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DRAWING CONTROL NO.  
P-A7-12958  
ACAD\PS\A7129581.DWG

REV  
A

MODEL DESCRIPTION  
UL/cUL AC 24V 750mA  
POWER SUPPLY

MODEL SPECIFICATION

835AS24075

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

**TAMURA CORPORATION OF AMERICA**  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.