

REV. Status

REVISION -
03/11/92 YN

REVISION A
REFORMATTED
06/09/97 TS

AC-DC UL ADAPTOR DC 6V 2000mA

A. Electrical Specifications:

1. Input Voltage: AC 120V ±10% 60 Hz ±0.5 Hz
2. Output Voltage and Current: DC 6V at 2000mA

V _{in}	2000mA Load	200mA Load
108	4.6 VDC MIN	-
120	5.5-6.5 VDC	9.3 VDC MAX
132	-	10.2 VDC MAX



NOTE: Specification applies after 10 minutes warm-up with 2000mA load and at any operating temperature

3. Operating temperature: 0 ° C to +40 ° C
4. Storage temperature: -20 ° C to +85 ° C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 1500Vrms 1 minute @ input to output


B. Typical performance data test condition:
T_a = +25 ° C measured after 10 minutes warm-up with input at 120V 60Hz

C. Safety Agencies:
UL File No. E82180
Part is UL approved as a battery charger

D. Nameplate: Information is as follows:
Metallic letters on a black background

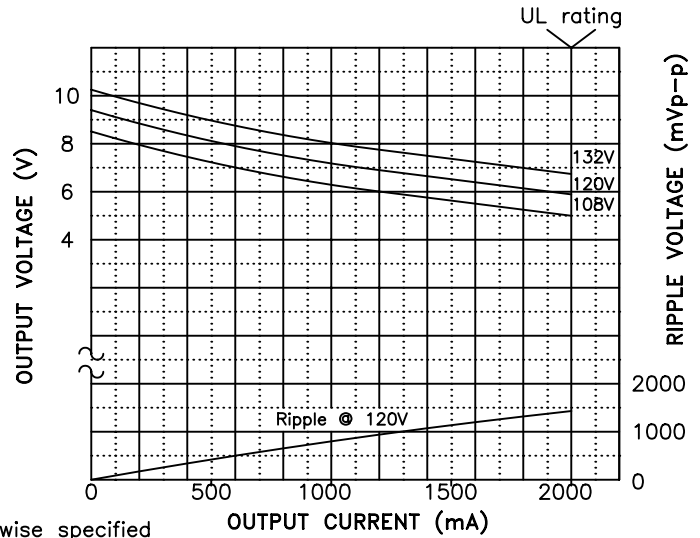

E. Mechanical Specifications:
All dimensions shown are nominal unless otherwise specified

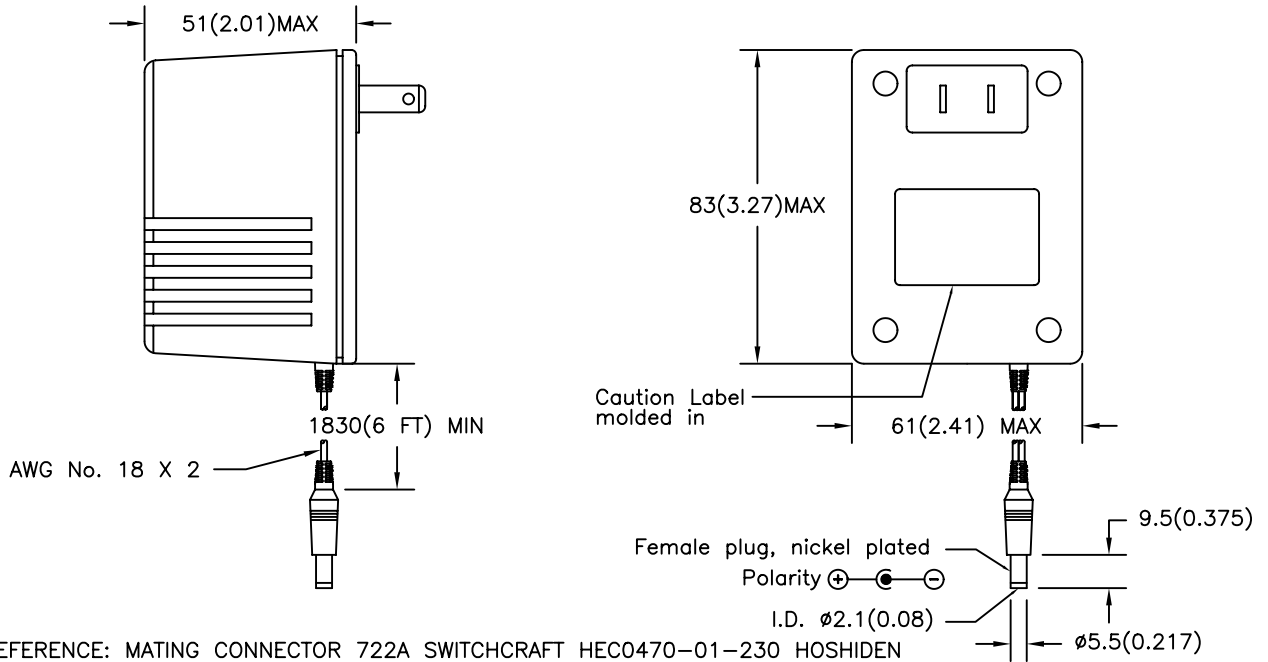

PREPARED BY:

D. Kelley

ENGINEER:

D. Suzuki

QUALITY CONTROL:

APPROVED:

D. Suzuki

REFERENCE: MATING CONNECTOR 722A SWITCHCRAFT HEC0470-01-230 HOSHIDEN

DRAWING CONTROL NO.	REV	MODEL DESCRIPTION	MODEL SPECIFICATION
P-A7-00046 (ACAD/PS/A7000461.DWG)	A	UL DC 6V 2000mA POWER SUPPLY	825A2617
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE		TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482	
		DIM: mm(In)	SCL: NONE SH: 1 OF 1
PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.			