




Isolation Transformer 8 pin PCMCIA






- Designed for modem, set-top box
- High voltage isolation
- Surface Mount Device withstands IR reflow profile process
- Complies with UL60950
- Supplementary insulation at 250Vrms working voltage
- Ultra low profile package (PCMCIA)



MODEL NUMBER

TTC-320

Electrical Specification	PNA	Tolerance	Condition
Turns Ratio	1:2.6	±5%	(1-4) : (8-5)
OCL (uH)	40	Min	100KHz, 0.1Vrms, (1-4)
DCR (Ω)	0.15	Max	(1-4)
	0.36	Max	(8-5)
Dielectric Rating Voltage (Hipot) (Vrms)	3750	Min	For one second From 1 to 8

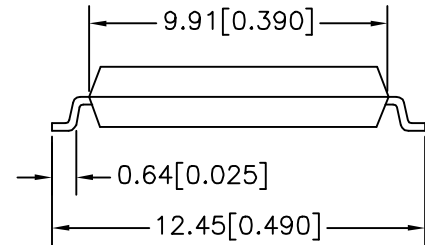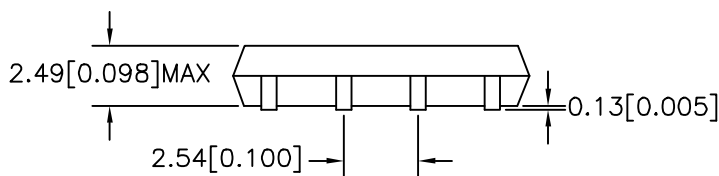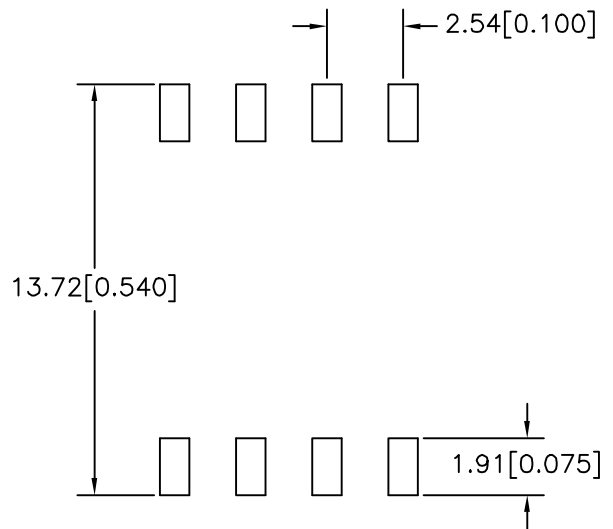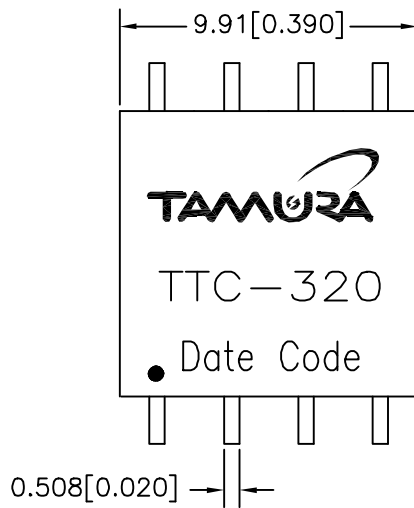

PREPARED BY:

D. Rund

ENGINEER:

L. Le

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

NOTE: Unless otherwise specified, all dimensions are mm[in] with tolerance of ±0.25[0.010]

DWG CONTROL NO.
P-A1-12865
ACAD\TTC\A1128651.DWG

REV
PRE

ISOLATION
TRANSFORMER

TTC-320

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

DIM: mm(In) SCL: 4/1 SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.