


DC/DC CONVERTER 3.0W +24V : ±12V

A. Electrical Specifications


- | | |
|----------------------------|---|
| 1. Input Voltage | 19.2-28.8Vdc (Rating 24V) |
| | CH1 CH2 |
| 2. Output Voltage | +12V±0.24 -12V±0.24 |
| 3. Output Current | 37.5-125mA 37.5-125mA |
| 4. Output Ripple | 40mVp-p typ. at 100µF for output cap.
Recommend low ESR. |
| 5. Line Regulation | ±1% MAX. |
| 6. Load Regulation | 8% MAX. |
| 7. Temperature coefficient | ±0.03%/°C |
| 8. Efficiency | 55% MIN. |
| 9. Output short protection | Built-in auto-reset protection |
| 10. Operating temperature | -10°C+70°C |
| 11. Storage temperature | -30°C+85°C |
| 12. Operating humidity | 95% RH max. without condensation |
| 13. Dielectric strength | DC500V 1 min. Input-Output, Case |
| 14. Insulation resistance | 50MΩ min. at DC500V |

MODEL NUMBER
IKD-2412





B. Marking; IKD-2412, TAMURA, Temecula Ca, date code and country of origin

C. Schematic

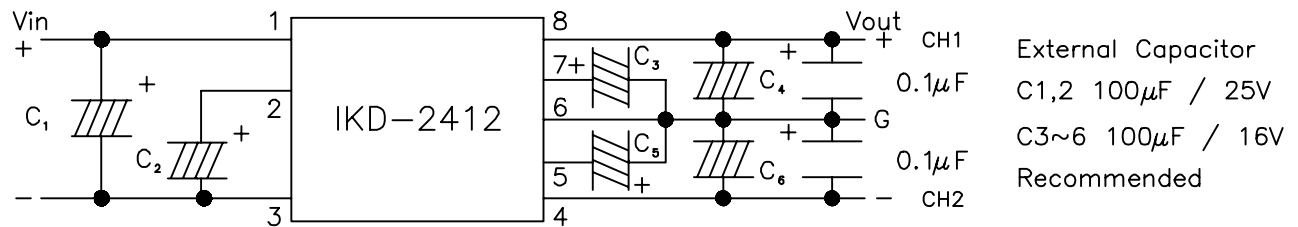

D. Mechanical specification

- | | |
|---------------------------|---|
| 1. Outline dimensions | 36.40[1.433] x 36.40[1.433] x 12.00[0.472]MAX. |
| 2. Soldering pin diameter | ∅0.75mm |
| 3. Vibration | 15G or max stroke 1.52mm whichever is smaller
10-200Hz |
| 4. Shock | 50G half-sine wave |

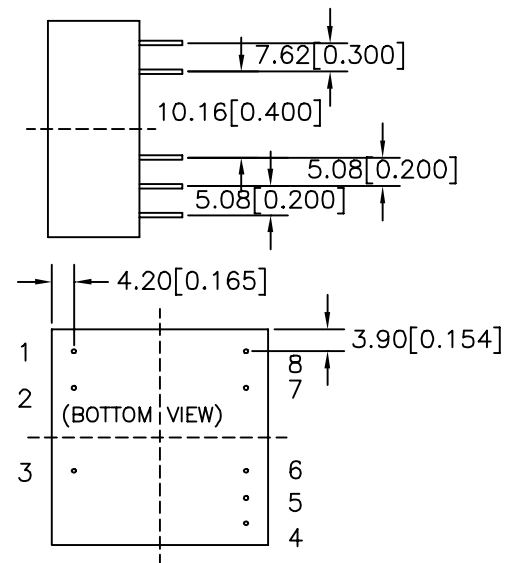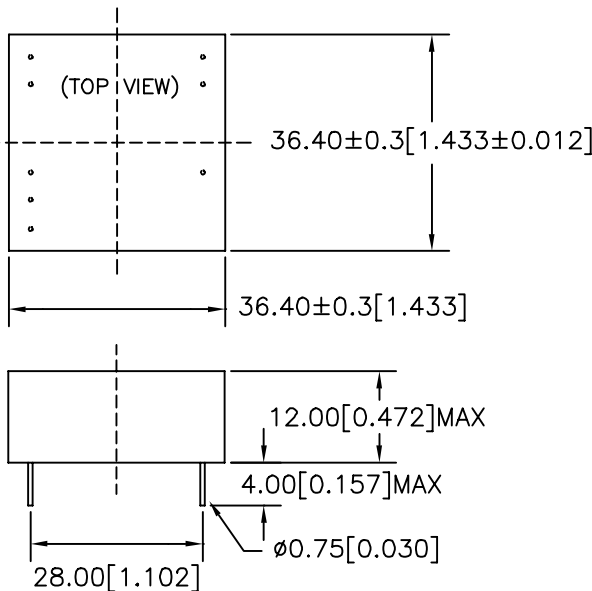

PREPARED BY:

D. Rund

ENGINEER:

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO. P-A3-12547
ACAD\DC-DC\A3125471.DWG

REV -
DC/DC CONVERTER
3W 24Vin ±12Vout

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

IKD-2412
MODEL SPECIFICATION
DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.