

**E C 4 B W**

S E R I E S

## 10 WATT 4:1 INPUT RANGE DC-DC CONVERTERS



### Features

- 10W Isolated Output
- 2" x 1" Case
- 4 : 1 Input Range
- Regulated Outputs
- Efficiency to 82%
- Pi Input Filter
- Continuous Short Circuit Protection
- Meets EN55022 Class A, Conducted

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	SIZE
				NO LOAD	FULL LOAD		
EC4BW01	9-36VDC	5 VDC	2000 mA	15 mA	534 mA	78	2" x 1"
EC4BW02		12 VDC	830 mA	15 mA	520 mA	80	
EC4BW03		15 VDC	666 mA	15 mA	520 mA	80	
EC4BW04		±12 VDC	±415 mA	20 mA	520 mA	80	
EC4BW05		±15VDC	±333mA	20 mA	520 mA	80	
EC4BW06		±5 VDC	±1000mA	20 mA	520 mA	80	
EC4BW07		3.3 VDC	2000mA	15 mA	362 mA	76	
EC4BW11	18-72VDC	5 VDC	2000 mA	10 mA	260 mA	80	2" x 1"
EC4BW12		12 VDC	830 mA	10 mA	257 mA	81	
EC4BW13		15 VDC	666 mA	10 mA	257 mA	81	
EC4BW14		±12 VDC	±415 mA	15 mA	257 mA	81	
EC4BW15		±15 VDC	±333 mA	15 mA	253 mA	82	
EC4BW16		±5 VDC	±1000mA	15 mA	253 mA	82	
EC4BW17		3.3 VDC	2000mA	10 mA	181 mA	76	

NOTE: 1. Nominal Input Voltage 24 or 48 VDC

### Specifications

INPUT SPECIFICATIONS:	
Input Voltage Range.....	24V.....9-36V
48V.....18-72V	


### OUTPUT SPECIFICATIONS:

Voltage Accuracy	
Single Output.....	±1.0% max.
Dual + Output.....	±1.0% max.
Dual - Output.....	±1.0% max.
Voltage Balance Dual Output at Full Load.....	±1.0% max.
Transient Response	
Single 25% Step Load Change.....	<500µ sec.
Dual FL-1/2 ±1% Error Band.....	<500µ sec.
Ripple and Noise, 20MHzBW.....	.75mV p-p max.
Temperature Coefficient.....	±0.02%/°C max.
Short Circuit Protection.....	Continuous
Line Regulation <sup>1</sup> Single/Dual Output.....	±0.2% max.
Load Regulation <sup>2</sup> Single/Dual Output.....	±1.0% max.

### GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage.....	.500 VDC
Isolation Resistance.....	10 ohms
Switching Frequency.....	300KHz, Typ.
Operating Ambient Temperature Range .....	-25°C to +71°C
De-rating, Above 71°C .....	Linearly to Zero power at 100°C
Case Temperature <sup>3</sup> .....	100°C max.
Cooling .....	Natural Convection
Storage Temperature Range.....	-40°C to + 100°C
EMI/RFI.....	Six sided Continuous Shield
Dimensions.....	2.00 x 1.00 x 0.40 inches (50.8 x 25.4 x 10.2 mm)
Case Material.....	Black Coated Copper with Non-Conductive Base
Weight.....	32g

### EC4BW Series Derating Curve

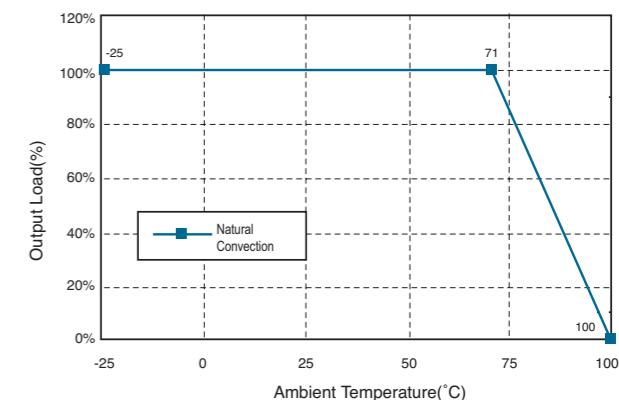

### NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 1/4 Load
3. Maximum case temperature under any operating condition should not exceed 100°C.

### PIN CONNECTION

Pin	Function
1	+ Input
2	- Input
3	+ Output
4	Common/NP
5	- Output

NP\*-NO PIN ON SINGLE OUTPUT

### CASE B

All Dimensions In Inches(mm)  
Tolerances Inches: x.xx= ±0.04, x.xxx= ±0.010  
Millimeters: x.x= ±1, x.xx= ±0.25

