



Main no. 800.962.0380
Fax no. 860 295.0670

[Request for Quote](#)

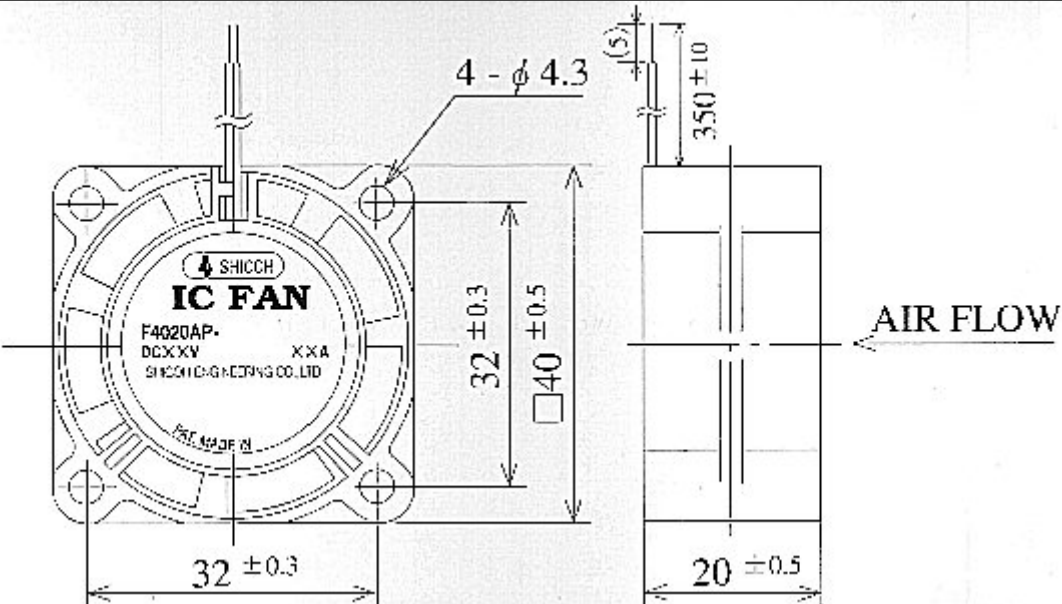
[Local Sales Offices Nationwide](#)

Shicoh Engineering Axial Flow 40mm TYPE: 40mm x 40mm

[Return to Table of Contents](#)
[Return to General Specifications](#)

[Return](#)

[Contact Pik Power for more information.](#)

| F4020AP Type | Ball Bearing | | 40 x 40 x 20mm | | | |
|---|------------------------------------|----------------------------|---------------------------|--------------------------|---------------------------|--------------------------|
|  | | | | | | |
| Model | F4020AP-05MCV 0420-5V | F4020AP-12MCW 0420-12LL | F4020AP-12QCW 0420-12L | F4020AP-12SCW 0420-12 | F4020AP-12TCW 0420-12H | F4020AP-24SCW 0420-24 |
| Rated Voltage (DCV) | 5 | 12 | 12 | 12 | 12 | 24 |
| Operating Voltage Range (DCV) | 4.5~5.5 | 10.2~13.8 | 10.2~13.8 | 10.2~13.8 | 10.2~13.8 | 20.4~27.6 |
| Rated Current (A) | 0.13 | 0.08 | 0.1 | 0.15 | 0.2 | 0.1 |
| Rated Input (W) | 0.65 | 0.96 | 1.2 | 1.8 | 2.4 | 2.4 |
| Max Air Volume (m ³ /min) / (cfm) | 0.08 / 2.8 | 0.07 / 2.5 | 0.09 / 3.2 | 0.13 / 4.6 | 0.15 / 5.3 | 0.13 / 4.6 |
| Max Static Pressure (Pa) | 13.7 | 9.8 | 17.6 | 34.3 | 39.2 | 34.3 |
| A-weighted Noise Level (dB) | 25 (1m) | 25 (1m) | 29 (1m) | 35 (1m) | 39 (1m) | 35 (1m) |
| Rotational Freq. (min ⁻¹) | 3,600 | 3,600 | 5,000 | 6,300 | 7,000 | 6,400 |
| Life expectancy (Hour) | 50,000 (Room temperature/humidity) | | | | | |

Catalogs are in Adobe's PDF (portable document file), a cross platform format. Files are viewed with Adobe's Acrobat Reader. If you need the free reader, click [here](#).

PIK Power represented by: Precision Sales & Associates

Created & maintained by [og-images](#).