

REV. Status

CE DC 4.5V 1200mA POWER SUPPLY

REVISION -
02/07/01 RJ

A. Electrical specifications

1. Input voltage: AC 230V ±10% 50Hz ±0.5Hz
2. Output voltage and current: DC 4.5V at 1200mA

V _{in}	100% Load	10% Full Load
207	3.27VDC MIN	-
230	4.2~4.8VDC	6.7VDC MAX
253	-	7.5VDC MAX



NOTE: Specification applies after 10 minutes warm-up with 1200mA load and at any operating temperature

3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 4000Vrms 1 minute @ input to output


B. Typical performance data test condition: Ta = +25 °C, measured after 10 minute warm-up with input at 230V 50Hz

C. Safety agencies
IEC 65.950, 742
CE Marking

D. Nameplate:
See drawing P-N1-12420 for details

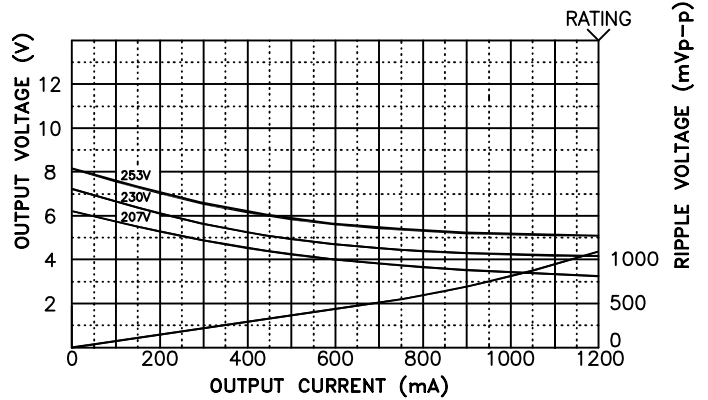

E. Mechanical Specifications
All dimensions nominal unless otherwise specified

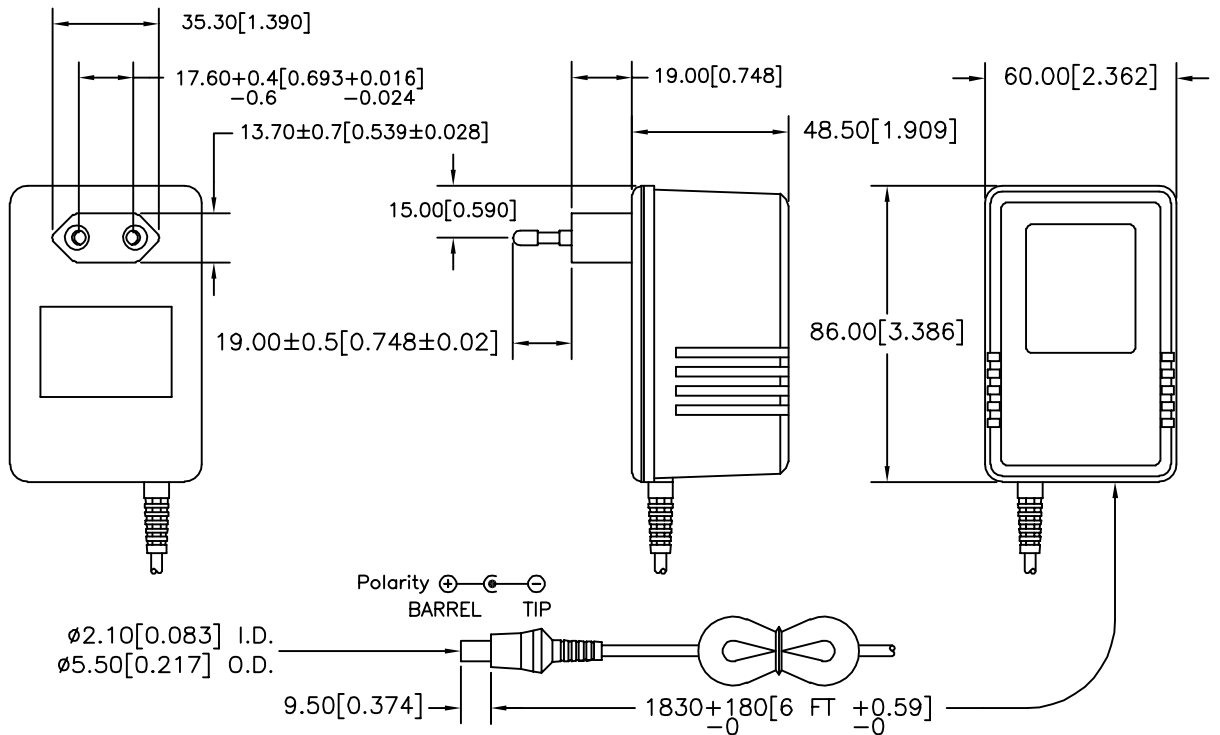

PREPARED BY:

D. Rund
ENGINEER:

R. Jones

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO.
P-A7-12568
ACAD\PS\A7125681.DWG

REV
-

CE DC 4.5V 1200mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

820FG44001

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.